

NOGACOOOL



NOGACOOOL

NOGACOOOL consists of a manifold & Loc-Line® flexible hose with a nozzle on top and a valve at the bottom, assembled on the powerful on/off Popeye magnet.

The plug attached can be replaced by a second Loc-Line® hose.

NOGACOOOL is supplied with a set of three nozzles: 1/16", 1/8", 1/4".

Working conditions are as follows:


Pressure: 2-3.4 Bar (30-50 Psi)

Flow rate: 940 l/hour (250 gal/hour)

Max. working Temp. 170°C.

Also available with magnet and manifold only

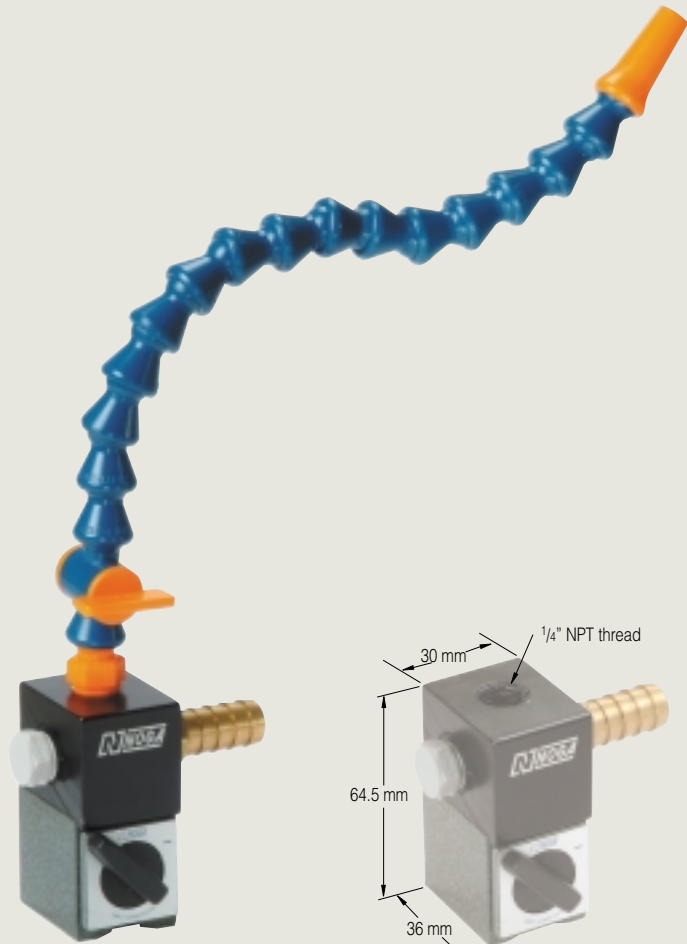


(order no. MC0161).



MC1601

MC0161

Spare parts

	Order no.
	320N Popeye magnet. Top thread M5 NF0037
	Manifold MC0156
	324 mm flexible Loc-Line® hose. Other dimensions available upon request. MC0320

	Order no.
	ø 1.6 mm plastic nozzle (1/16") MC0066
	ø 3.2 mm plastic nozzle (1/8") MC0063
	ø 6.3 mm plastic nozzle (1/4") MC0067
	Wide plastic nozzle, 16 holes ø 1 mm MC0072
	Wide plastic nozzle, 16 holes ø 1.5 mm MC0073