



## DIGITAL PROTRACTOR

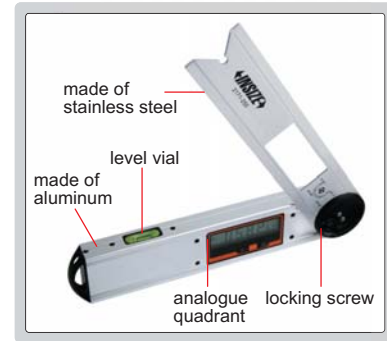

2171-250

Unit: mm

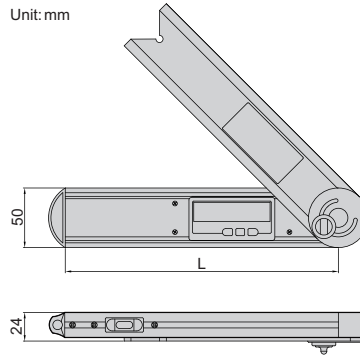

- Buttons: ON/OFF, HOLD (keep the reading), ZERO, ABS (absolute and incremental measurement)
- Fix the locking screw at 4 positions for different measuring ranges:  $0^{\circ}\sim 225^{\circ}$ ,  $-225^{\circ}\sim 0^{\circ}$ ,  $-45^{\circ}\sim 180^{\circ}$ ,  $-180^{\circ}\sim 45^{\circ}$
- Remove the locking screw for  $360^{\circ}$  range
- With level vial
- Battery CR2032
- Automatic power off

Code	Size (L)	Range	Resolution	Accuracy
2171-250	250mm	0-360°	0.05°	±0.15°

