


ONE REVOLUTION PRECISION DIAL INDICATOR




2885-008

- Eliminate the possibility of reading errors due to miscounting
- Shockproof
- Jeweled bearing
- Free stroke: 4.5mm
- With limit pointers
- Optional accessory: backs (page 132), contact points (page 128~131), lifting lever(code **6289-150**)

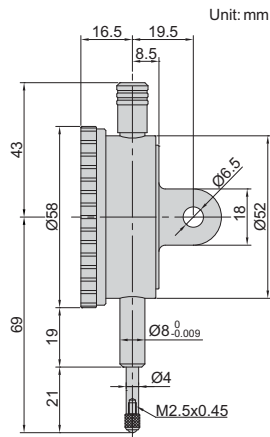


lifting lever (optional)

SHOCK
PROOF

JEWELLED BEARING

lever device



Within the measuring range,
the spindle is in contact with the lever



When the measuring range is exceeded,
the spindle leaves the lever

Code	Range	Graduation	Accuracy	Hysteresis	Range/rev	Dial reading	Remark
2885-008*	0.08mm	0.001mm	3µm	1.5µm	1mm	40-0-40	lug back
2885-008F*	0.08mm	0.001mm	3µm	1.5µm	1mm	40-0-40	flat back

* Supplied with manufacturer calibration certificate