


- Clockwise and counter-clockwise operation
- Unit: N.m, in.lb, ft.lb, kg.cm
- Peak and track working mode
- Target torque value can be set, with audible and visible alarm:
  - Green LED light on and buzzer sounds when target torque value is 90%~100% of target torque
  - Red LED light on and buzzer sounds when target torque value is reached
- Power off automatically in 5 minutes without any operations
- Non-slip grip handle
- With overload record (once the torque reaches 110% of the maximum range)

#### SPECIFICATION

| Code              |                   | IST-WP6       | IST-WP12  | IST-WP20 |
|-------------------|-------------------|---------------|-----------|----------|
| Range             |                   | 1.2~6N.m      | 2.4~12N.m | 4~20N.m  |
| Accuracy          | clockwise         | ±3%           | ±3%       | ±3%      |
|                   | counter-clockwise | ±4%           | ±4%       | ±4%      |
| Resolution        |                   | 0.001N.m      | 0.01N.m   | 0.01N.m  |
| Square driver (L) |                   | 1/4"          | 1/4"      | 1/4"     |
| Power supply      |                   | 1×AAA battery |           |          |
| Length            |                   | 260mm         | 260mm     | 260mm    |
| Weight            |                   | 430g          | 430g      | 430g     |

## SMALL RANGE DIGITAL TORQUE WRENCH

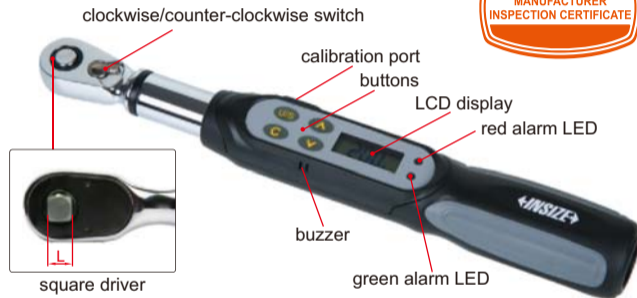

IST-WP20

#### OPTIONAL ACCESSORY

Calibration cable

IST-SD-CABLE