


Special External Micrometer



POINT



MMA25-P2

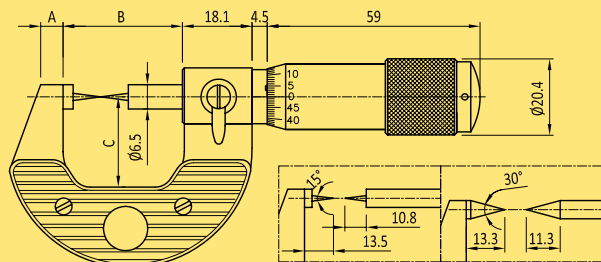

Measuring Range mm	Reading mm	Point Angle	Type	A mm	B mm	C mm	Measuring Range inch	Reading inch	Type
0 -25	0.01	15°	MMA25-P1	7.1	57.5	30.5	0 -1"	0.001"	INA1-P1
		30°	MMA25-P2						INA1-P2
25-50		15°	MMA50-P1	8	83	45	1-2"		INA2-P1
		30°	MMA50-P2						INA2-P2
50-75		15°	MMA75-P1	8	108	58	2-3"		INA3-P1
		30°	MMA75-P2						INA3-P2
75-100		15°	MMA100-P1	8	133	67.5	3-4"		INA4-P1
		30°	MMA100-P2						INA4-P2

FEATURES

- Spindle made from stainless steel for rust prevention
- Measuring Faces – 15° & 30° hardened steel points having radius 0.3 mm approximately
- An in-built ratchet in the thimble
- Zero setting once done cannot be easily tampered with
- Sharp laser marking for better visibility & durability
- Heat insulating grip plates cover the entire handling portion of the micrometer frame
- Robust design withstands toughest workshop conditions



Application

For measuring web thickness of drills, small grooves, keyways.

SPLINE



MMA25-S3

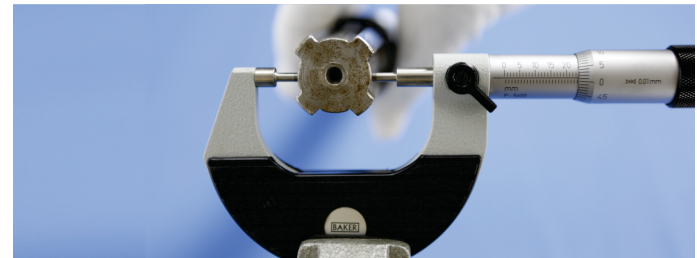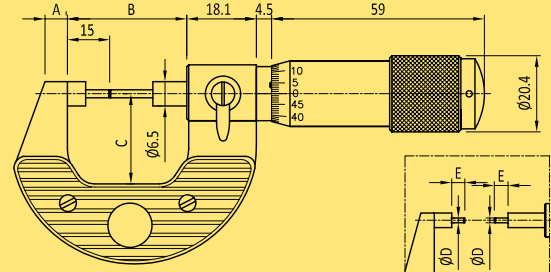

Measuring Range mm	Reading mm	Type	A mm	B mm	C mm	D mm	E mm	Measuring Range inch	Reading inch	Type
0 -25	0.01	MMA25-S2	7.1	57.5	30.5	2	5	0 -1"	0.001"	INA1-S2
		MMA25-S3				3	8			INA1-S3
		MMA50-S3				3	8			INA2-S3
25-50		MMA50-S3	8	83	45	3	8	1-2"		INA2-S3
50-75		MMA75-S3	8	108	58	3	8	2-3"		INA3-S3
75-100		MMA100-S3	8	133	67.5	3	8	3-4"		INA4-S3

FEATURES

- Spindle made from stainless steel for rust prevention
- Measuring faces: carbide tipped available in two types Ø2 x 5 mm & Ø3 x 8 mm
- Zero setting once done cannot be easily tampered with
- An in-built ratchet in the thimble
- Sharp laser marking for better visibility & durability
- Heat insulating grip plates cover the entire handling portion of the micrometer frame
- Robust design withstands toughest workshop conditions

Application

For measuring recesses, grooves, Splines, Slots, Keyways & small parts in precision work.