



Setting Rings for Air Plug Gauge



RANGE: 1.5-315 mm

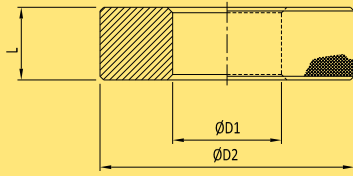

DIA. 1.5 mm - 100 mm

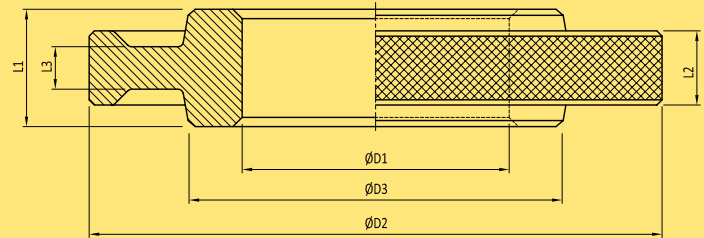

DIA. 100 mm - 315 mm

$\phi D1$		$\phi D2$	L
ABOVE	UPTO & INC.		
1.5	2.5	22	6
2.5	5.0	22	10
5.0	10.0	32	12
10.0	15.0	38	14
15.0	20.0	45	16
20.0	25.0	53	18
25.0	32.0	63	20
32.0	40.0	71	24
40.0	50.0	82	32
50.0	60.0	100	32
60.0	70.0	112	32
70.0	80.0	125	32
80.0	90.0	140	32
90.0	100.0	160	32

$\phi D1$		$\phi D2$	$\phi D3$	THICKNESS		L3
ABOVE	UPTO & INC.			L1	L2	
100.0	110.0	170	132	36	14	8
110.0	120.0	180	140	36	16	10
120.0	130.0	190	150	36	16	10
130.0	140.0	200	160	36	18	12
140.0	150.0	212	170	36	18	12
150.0	160.0	224	180	36	20	14
160.0	170.0	236	190	40	20	14
170.0	180.0	250	200	40	20	14
180.0	190.0	265	212	40	22	16
190.0	200.0	280	224	45	22	16
200.0	212.0	300	236	45	22	16
212.0	224.0	315	250	45	25	18
224.0	236.0	335	265	50	25	18
236.0	250.0	355	280	50	28	20
250.0	265.0	375	300	50	28	20
265.0	280.0	400	315	56	28	20
280.0	300.0	425	335	56	32	22
300.0	315.0	450	355	56	32	22

FEATURES

- Used for setting of pneumatic length measuring instruments
- Made from oil hardening non shrinking gauge steel, hardened and tempered to 60-62 HRC
- Subzero treated at -80°C for long term dimensional stability
- Actual dimensions duly etched
- Calibrated at 20°C under Standards Room conditions against National/International traceable standards
- Certificate of calibration is provided along with each master traceable to National/International standards. Certificate under NABL (as per ISO 17025) as per request
- Manufactured as per DIN2250-1 Type B

