



# New Products

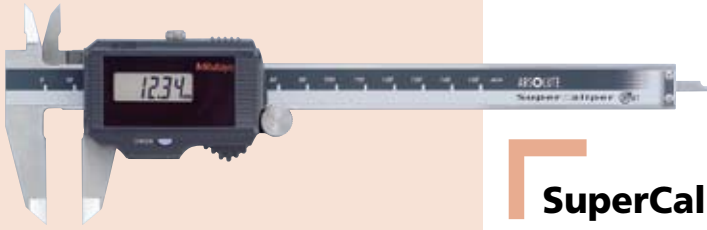


## SuperCaliper

Refer to pages D-3–D-4 for details.

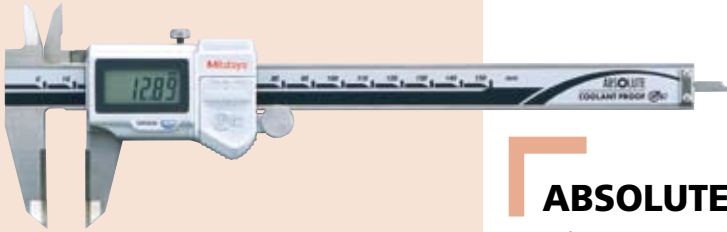

## ABSOLUTE Coolant Proof Caliper

Refer to pages D-5–D-6 for details.

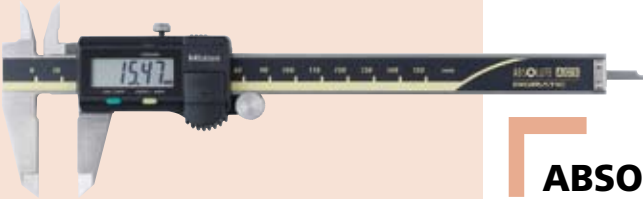

## ABSOLUTE Digimatic Caliper

Refer to pages D-7–D-8 for details.



## ABSOLUTE Digimatic Offset Caliper

Refer to page D-27 for details.



## Digimatic Height Gage

Refer to pages D-43–D-44 for details.



## Digimatic Caliper·Caliper

Digimatic Caliper·Caliper



### INDEX

#### Digimatic Calipers

SuperCaliper (Solar type)	D-3
ABSOLUTE Coolant Proof Caliper	D-5
ABSOLUTE Digimatic Caliper	D-7
Long ABSOLUTE Digimatic Caliper	D-9
ABSOLUTE Solar Caliper (Solar type)	D-10

#### Calipers

Vernier Caliper	D-11
ABSOLUTE Digimatic Caliper	D-14
Dial Caliper	D-16
ABSOLUTE Coolant Proof Carbon Fiber Caliper	D-18
Vernier Caliper (Nib Style Jaws)	D-24
Long Jaw Vernier Caliper	D-25
Offset Caliper	D-27
Offset Centerline Caliper	D-28
ABSOLUTE Back-Jaw Centerline Caliper	D-29
Point Caliper	D-30
Blade Type Caliper	D-31
ABSOLUTE Inside Caliper	D-32
Neck Caliper	D-34
Tube Thickness Caliper	D-35
Hook Type Vernier Caliper	D-36
Swivel Vernier Caliper	D-36
ABSOLUTE Low Force Caliper	D-37
ABSOLUTE Snap Caliper	D-38

Introduction for Measurement data recording tools for Calipers and Height Gages (optional)

Quick Guide to Precision Measuring Instruments	D-40
--	------

#### Digimatic Height Gages

Digimatic Height Gage	D-43
ABSOLUTE Digimatic Height Gage	D-47

#### Height Gages

Vernier Height Gage	D-51
Dial Height Gage	D-52
CERA Caliper Checker	D-53
Optional accessories	D-54

#### High Precision Height Gages

Linear Height	D-55
QM-Height	D-57
Quick Guide to Precision Measuring Instruments	D-59

#### Depth Gages

Depth Micrometer	D-61
Depth Micro Checker	D-63
ABSOLUTE Digimatic Depth Gage (SERIES 571)	D-64
Vernier Depth Gage	D-65
Depth Gage	D-66
Extension Bases	D-67
Depth Gage Attachment	D-67
Dial Depth Gage (SERIES 7)	D-68
ABSOLUTE Digimatic Depth Gage (SERIES 547)	D-69

D

D

D

D

D

D

D

D


D

D

D

## Digimatic Height Gage·Height Gage

Digimatic Height Gage·Height Gage

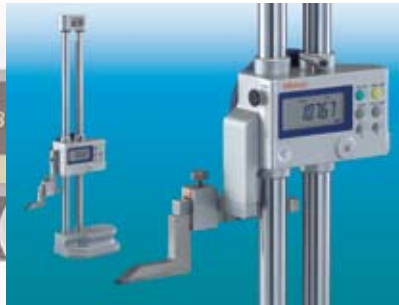

## Height Gage

Height Gage



## Depth Gage

Depth Gage




# Calipers

An industry standard in measuring tools

## SuperCaliper

### SERIES 500 — No battery or origin reset needed for IP67 digital caliper


- Top-of-the-line digital caliper. Solar type caliper with no battery and IP67 protection assures waterproof reliability.



- With no annoying origin restoration necessary, a measurement can be started any time and there is no restriction on operating speed.
- The impact resistance of the display unit has been increased for improved usability in workshop conditions.

- Waterproof function makes this SuperCaliper suitable for use in an environment containing large amounts of cutting fluid or coolant. Operability is equivalent to the mechanical type caliper.
- This SuperCaliper uses components that do not contain harmful substances and is compatible with RoHS Directives.
- Slider operation is smooth and comfortable.

High quality guide surface finish for smooth slider movement

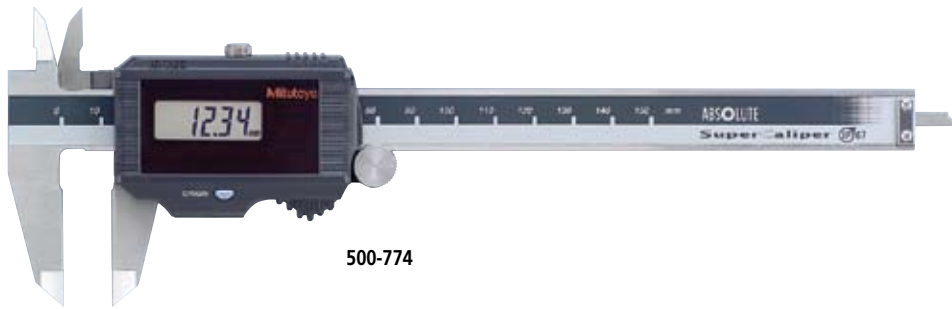


500-774

## SPECIFICATIONS

Metric				Inch/metric			
Order No.	Range	Remarks	Mass	Order No.	Range	Remarks	Mass
500-776	0 - 150mm	with data output	180g	500-786	0 - 6"	with data output	180g
500-777	0 - 200mm		210g	500-787	0 - 8"		210g
500-774	0 - 150mm	w/o data output	180g	500-784	0 - 6"	w/o data output	180g
500-775	0 - 200mm		210g	500-785	0 - 8"		210g

## DIMENSIONS

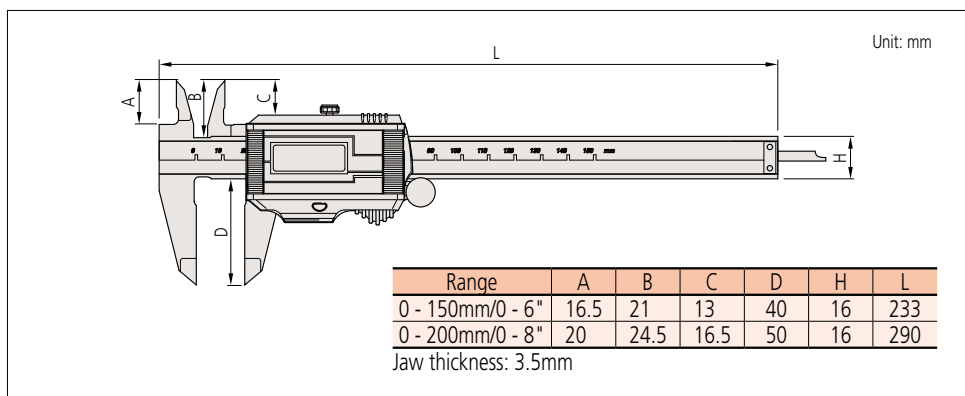

**ABSOLUTE™** (Refer to page X for details.)



(Refer to page X for details.)



(Refer to page X for details.)

www.tuv.com  
ID 000006883



An inspection certificate is supplied as standard. Refer to page X for details.


## IP67 protection level

**Level 6:** Dust-proof.

No ingress of dust allowed.

**Level 7:** Protected against water penetration.

Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed to a depth of 1 meter in water under standardized conditions of pressure and time (30 min.).

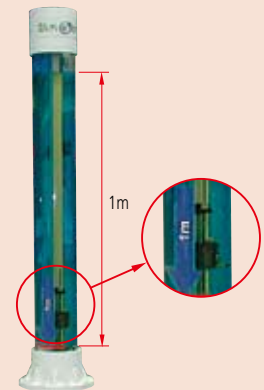

Demonstration device

## Technical Data

- Resolution: 0.01mm or .0005"/0.01mm
- Accuracy: ±0.02mm (excluding quantizing error)
- Repeatability: 0.01mm
- Quantizing error: ±1 count
- Dust/Water protection level: IP67\*
- Power supply: Solar cell\*\*
- Display: LCD
- Scale type: ABSOLUTE electromagnetic induction linear encoder
- Max. response speed: Unlimited
- \* This model is not waterproof type. Therefore, rustproofing shall be applied after use.
- \*\* Can be used continuously above 60lux ambient illumination.



## Functions


Origin-set: Absolute origin position can be changed.  
 Alarm: Error message is displayed and measurement functions become inoperative if:

- Tool is turned on when both illumination and charging voltage are insufficient.
- Main unit is extremely polluted and miscalculation occurs in the display unit.



## Air leak test equipment for water resistance inspection

Generally, an air leak test is adopted for evaluating water resistance.

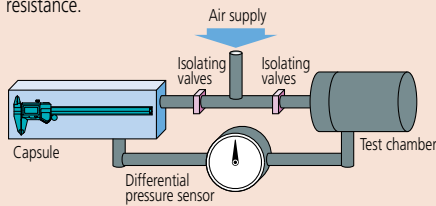

Procedure: Place the measuring tool inside the capsule and seal it. Then fill the capsule and the test chamber with air at the required pressure and close the isolating valves. If there is no leak in the measuring tool, the differential pressure sensor will read zero, because the amount of air inside the test chamber is unchanging. However, if there is a leak in the measuring tool, the differential pressure sensor will show a non-zero reading due to a decrease in pressure inside the test chamber as air leaks into the tool. By detecting this differential pressure, GO/NG judgment for the severity of the leak is performed. This air leak test is performed for all ABS coolant proof calipers and coolant proof micrometers.



Air leak test equipment for ABS coolant proof caliper

## Optional accessories

(Dedicated for the models equipped with a digimatic output function (Code No. 500-776, 500-777, 500-786 and 500-787))  
 For details, refer to page D-39.

- **Connecting cables for IT/DP/MUX\***
  - 05CZA624: SPC cable with data button (1m)
  - 05CZA625: SPC cable with data button (2m)
- **USB Input Tool Direct**
  - 06ADV380A: SPC cable for USB-ITN-A (2m)
- **Connecting cables for U-WAVE-T**
  - 02AZD790A: SPC cable for U-WAVE with data button (160mm)
  - 02AZE140A: SPC cable for foot switch



\* Cannot be used for other than water resistant type Digital calipers with external output function.



## About the charge function (SuperCaliper)

**The minimum illumination required in the uncharged state is 60lux.**

As shown in the table 'JIS Z 9110 Artificial Illumination Intensity Standard', this SuperCaliper can be used with confidence in a normal work environment.

**The charge function allows the operator to use the SuperCaliper without interrupting work even if the ambient illumination is temporarily insufficient.**

- In the fully charged state this SuperCaliper can operate for approximately one hour in an environment of 50lux illumination (less than the minimum necessary illumination intensity).
- The time necessary for full charge varies according to the charging conditions. If the SuperCaliper is left unused in an illumination of 500 lux (usual for manufacturing environments), it takes approximately one hour to reach full charge.

Illumination (lx)	Site (possible operations)
1500	
1000	Design room, drafting room (Fine visual work)
750	
500	Conference room, control room (Usual manufacturing environment) (Normal visual work)
300	
200	Machine room, electric room, lecture hall (Rough visual work)
150	
100	Corridor, passage, stairs (Very rough visual work)
75	
50	Emergency staircase, warehouse (Loading, unloading work)
30	
20	

Excerpts from JIS Z 9110 Artificial illumination Intensity Standard




# Calipers

An industry standard in measuring tools

## ABSOLUTE Coolant Proof Caliper SERIES 500 — with Dust/Water Protection Conforming to IP67 Level

- ABS Coolant Proof Caliper with Dust/Water Protection conforming to IP67 Level. Can be used in workshop conditions exposed to coolant, water, dust or oil. 100% air-leak test ensures every caliper conforms to IP67.
- Font height is 9mm (increased by 22%) and visibility is improved (except for 0 - 300mm / 0 - 12" models).
- Battery cap does not require a screw driver for battery replacement (except for 0 - 300mm / 0 - 12" models).
- Extended battery life of 5 years due to low current integrated circuit (except for 0 - 300mm/0 - 12" models).
- Easy to use — advanced ergonomic design uses only 1 button.
- Incorporates Mitutoyo's ABSOLUTE measurement system. No need to reset the origin.
- The automatic power-on/off function shuts down the LCD display after 20 minutes inactivity, but the ABS scale origin is unaffected. Power is restored to the display when the slider is moved.
- Stepped features can be measured.
- Can be integrated into statistical process control and measurement systems.
- An inspection certificate is supplied as standard. (However, this cannot be used as a calibration certificate as it is undated.)

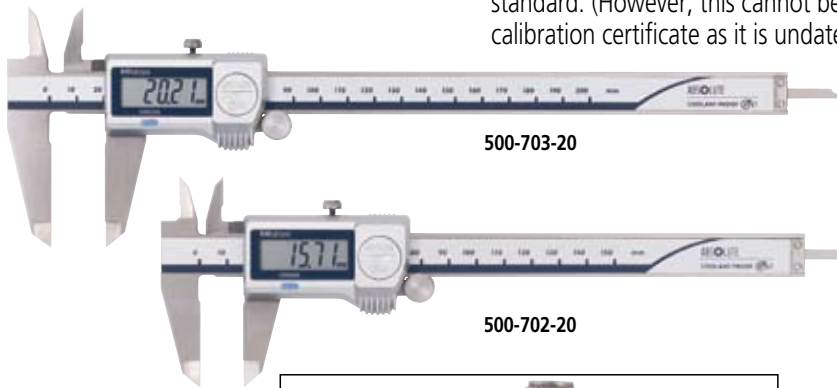

500-703-20

500-702-20




Remarkably easy to read display



**GOOD DESIGN  
AWARD 2015**

A built-in ABS (absolute) scale means that these calipers are ready to use immediately after power-on without origin resetting – just like using a vernier caliper.

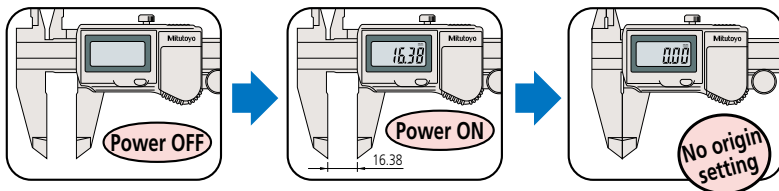

### Optional accessories

For details, refer to page D-39.



### Connecting cables for IT/DP/MUX\*

- 05CZA624: SPC cable with data button (1m)
- 05CZA625: SPC cable with data button (2m)



### USB Input Tool Direct

- 06ADV380A: SPC cable for USB-ITN-A (2m)

### Connecting cables for U-WAVE-T

- 02AZD790A: SPC cable for U-WAVE with data button (160mm)
- 02AZE140A: SPC cable for footswitch

\* Cannot be used for other than water resistant type Digital calipers with external output function

**ABSOLUTE™** (Refer to page X for details.)



(Refer to page X for details.)



(Refer to page X for details.)




An inspection certificate is supplied as standard. Refer to page X for details.


### Smooth slider movement makes for comfortable operation.

High quality guide surface finish for smooth slider movement

Conventional



Coolant proof caliper



### Technical Data

Resolution: 0.01mm or .0005"/0.01mm

Repeatability: 0.01mm or .0005"/0.01mm

Quantizing error: Not including ±1 count

Dust/Water protection level: IP67 (IEC60529)\*

Display: LCD

Scale type: ABSOLUTE electromagnetic induction linear encoder

Max. response speed: Unlimited

Battery: **SR44** (1 pc, **938882**, for initial operational checks (standard accessory))

Battery life: Approx. 5 years under normal use (1 year: 0 - 300mm/0 - 12" models)

\* Although these models are IP67 rated, care should be taken to dry tool after use.

## Functions

Origin-set: Absolute origin position can be changed.

Data output: Measurement data output connector allows integration into statistical process control and measurement systems.

Automatic power on/off: LCD display will turn off after 20 minutes inactivity, but the ABS scale unit origin is stored. Power is restored when the slider is moved.

Alarm: Error message is displayed if error in calculation is found and measurement is stopped. Measurement will not be continued while error is displayed. Also, if the battery voltage becomes low, "B" appears to alert the user before measurement is no longer possible.

## IP67 protection level

IP67

First characteristic number	Protection from solid objects (people or things)		Second characteristic number	Protection from liquids (water, etc.)	
	Brief description	Description		Brief description	Description
6	Dust-proof.	No ingress of dust allowed.	7	Protected against water penetration.	Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.

For details of the test conditions used in evaluating each degree of protection, please refer to the original standard.

## SPECIFICATIONS


Metric								
Order No.	Range	Accuracy*	Mass	Measurement data output port	Thumb roller	Remarks		
500-702-20	0 - 150mm	±0.02mm	168g	—	—			
500-703-20	0 - 200mm		198g					
500-712-20	0 - 150mm		168g					
500-713-20	0 - 200mm		198g					
500-719-20	0 - 150mm		168g			✓	✓	Depth bar ø1.9mm
500-721-20	0 - 150mm		168g					Carbide-tipped jaws for outside measurement
500-722-20	0 - 200mm		198g					Carbide-tipped jaws for outside and inside measurement
500-723-20	0 - 150mm		168g					
500-724-20	0 - 200mm		198g					
500-714-10	0-300mm		±0.03mm			350g	✓	✓
500-718-11		345g		—				
500-704-10		350g		✓				
500-708-11		345g		—				

\* Not including quantizing error of ±1 count in LSD

Inch/Metric									
Order No.	Range	Accuracy*	Mass	Measurement data output port	Thumb roller	Remarks			
500-731-20	0 - 6"	±.001"/ ±0.02mm	168g	—	—	Carbide-tipped jaws for outside measurement			
500-732-20	0 - 8"		198g						
500-733-20	0 - 6"		168g						
500-734-20	0 - 8"		198g						
500-735-20	0 - 6"		168g			✓	✓	Carbide-tipped jaws for outside measurement	
500-736-20	0 - 8"		198g					Carbide-tipped jaws for outside and inside measurement	
500-737-20	0 - 6"		168g						
500-738-20	0 - 8"		198g						
500-752-20	0 - 6"		168g			—	—		
500-753-20	0 - 8"		198g						
500-762-20	0 - 6"		168g			✓	—		
500-763-20	0 - 8"		198g						
500-768-20	0 - 6"		168g			—		Depth bar ø1.9mm	
500-769-20	0 - 6"		168g			✓		Depth bar ø1.9mm	
500-764-10	0-12"		".0015"/ ±0.03mm"			350g	✓	✓	
500-754-10						350g			—

\* Not including quantizing error of ±1 count in LSD

## DIMENSIONS

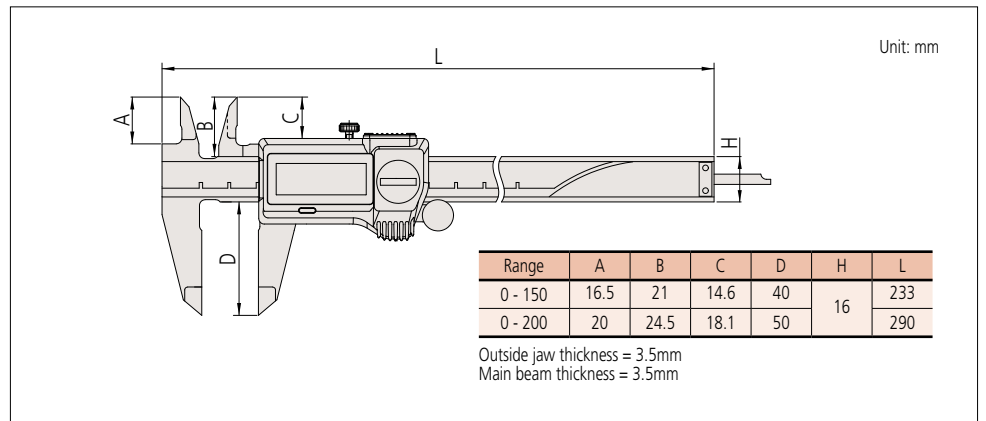


# Calipers


An industry standard in measuring tools

## ABSOLUTE Digimatic Caliper 500 Series — with exclusive ABSOLUTE Encoder Technology

- ABSOLUTE electromagnetic induction linear encoder system is introduced (except for 0 - 300mm/0 - 12" models).
- New ergonomic design with finger rest.
- The ZERO/ABS button allows the display to be Zero-Set at any slider position along the scale for comparison measurements. This button will also allow return to the absolute (ABS) mode and display of the true position from the origin (usually jaws closed point).
- Large and clear LCD readout.
- Smooth slider movement makes for comfortable operation.
- 18,000 hours battery life.
- Allows step measurement.
- Carbide-tipped jaw calipers are optimal for rough finished parts, castings, grinding stones, etc.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.

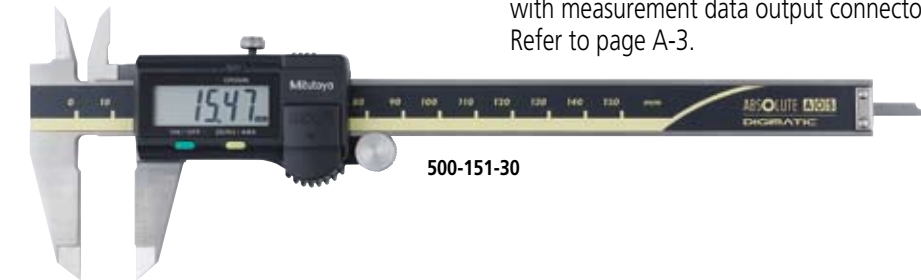


A built-in ABS (absolute) scale means that these calipers are ready to use immediately after power-on without origin resetting – just like using a vernier caliper.

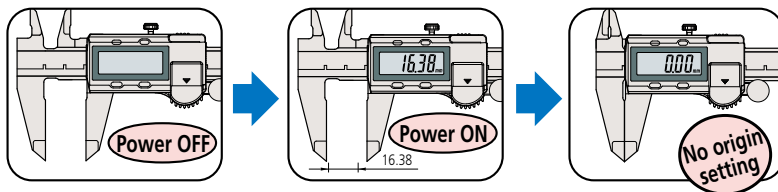

### Optional accessories

Dedicated for the models equipped with a digimatic output function. For details, refer to page D-39.

#### 959143: Data hold unit

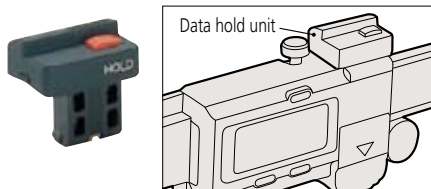

#### Connecting cables for IT/DP/MUX

- 959149: SPC cable with data button (1m)
- 959150: SPC cable with data button (2m)



#### USB Input Tool Direct

- 06ADV380C: SPC cable for USB-ITN-C (2m)

#### Connecting cables for U-WAVE-T

- 02AZD790C: SPC cable for U-WAVE with data button (160mm)
- 02AZE140C: SPC cable for footswitch

ABSOLUTE™ (Refer to page X for details.)




An inspection certificate is supplied as standard. Refer to page X for details.

### Technical Data

Accuracy:  $\pm 0.02\text{mm}$  ( $\leq 200\text{mm}$ ),  $\pm 0.03\text{mm}$  ( $\leq 300\text{mm}$ ) (excluding quantizing error)  
 Resolution: 0.01mm or .0005"/0.01mm  
 Repeatability: 0.01mm  
 Display: LCD  
 Scale type\*: ABSOLUTE electromagnetic induction linear encoder  
 \*ABSOLUTE electrostatic capacity static linear encoder for 0 - 300mm/0 - 12" models.  
 Max. response speed: Unlimited  
 Battery: **SR44** (1 pc), **938882**, for initial operational checks (standard accessory)  
 Battery life: Approx. 5 years under normal use (18,000 hours for continuous use)

Smooth slider movement makes for comfortable operation.

High quality guide surface finish for smooth slider movement

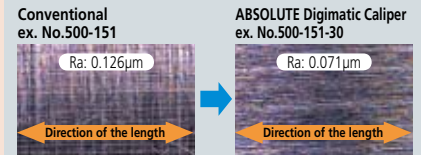

## Functions

**Absolute measurement:** After power is turned ON, measurement can be started without zero-setting if origin-setting was previously performed. The Absolute origin position can be changed by the ORIGIN button.

**Incremental measurement:** Display can be set to zero at any arbitrary position for comparative measurements

**Low-voltage alert:** If the battery voltage becomes low, a "B" appears in the display to alert the user before measurement is no longer possible. A battery change advisory alert precedes this alert.

**Data output:** By using the connecting cable (option), measurement data can be output.

**Data hold:** By using the data hold unit (option), the displayed value can be held. This cannot be used with the data output function.

## SPECIFICATIONS

Metric						
Order No.	Range	Accuracy**	Mass	Depth bar	Fine adjustment	Remarks
500-150-30	0 - 100mm	±0.02mm	137	ø1.9mm rod	with thumb roller	—
500-180-30*					—	
500-151-30					with thumb roller	
500-154-30	0 - 150mm	±0.02mm	162	Blade	with thumb roller	Carbide-tipped jaws for outside measurement
500-155-30						Carbide-tipped jaws for outside and inside measurement
500-158-30						—
500-181-30*						—
500-152-30	0 - 200mm	±0.02mm	192	Blade	with thumb roller	Carbide-tipped jaws for outside measurement
500-156-30						Carbide-tipped jaws for outside and inside measurement
500-157-30						—
500-182-30*						—
500-153	0 - 300mm	±0.03mm	350	—	with thumb roller	—

\* Without SPC data output

\* Not including quantizing error of ±1 count in LSD

Inch/Metric						
Order No.	Range	Accuracy**	Mass	Depth bar	Fine adjustment	Remarks
500-170-30	0 - 4"	±0.001"/ ±0.02mm	137	.075" rod	with thumb roller	—
500-195-30*						—
500-171-30						Blade
500-174-30	0 - 6"	±0.001"/ ±0.02mm	162	.075" rod	with thumb roller	Carbide-tipped jaws for outside measurement
500-175-30						Carbide-tipped jaws for outside and inside measurement
500-178-30						—
500-196-30*						Carbide-tipped jaws for outside measurement
500-159-30*	0 - 8"	±0.001"/ ±0.02mm	192	Blade	with thumb roller	Carbide-tipped jaws for outside and inside measurement
500-160-30*						—
500-172-30						Carbide-tipped jaws for outside measurement
500-176-30						Carbide-tipped jaws for outside and inside measurement
500-177-30	0 - 8"	±0.001"/ ±0.02mm	192	Blade	with thumb roller	—
500-197-30*						Carbide-tipped jaws for outside measurement
500-163-30*						Carbide-tipped jaws for outside and inside measurement
500-164-30*						—
500-173	0 - 12"	±0.0015"/ ±0.03mm	350	—	—	Carbide-tipped jaws for outside measurement
500-167						Carbide-tipped jaws for outside and inside measurement
500-168						—
500-193*						—
500-165*	0 - 12"	±0.0015"/ ±0.03mm	350	—	—	Carbide-tipped jaws for outside measurement
500-166*						Carbide-tipped jaws for outside and inside measurement

\* Without SPC data output

\* Not including quantizing error of ±1 count in LSD

## DIMENSIONS

Unit: mm

Range	A	B	C	D	H	L
0-100mm	16.5	21	14.5	40	16	182
0-150mm	16.5	21	14.5	40	16	233
0-200mm	20	24.5	18	50	16	290
0-300mm	22	27.5	19.8	64	20	404

Jaw thickness: 3.5mm for 0-100mm/0-150mm/0-200mm models and 3.8mm for 0-300mm model

# Calipers

An industry standard in measuring tools

**ABSOLUTE™** (Refer to page X for details.)

## Long ABSOLUTE Digimatic Caliper 500 Series — with Exclusive ABSOLUTE Encoder Technology

- Long Digital caliper incorporating an ABSOLUTE scale and available with a measuring range from 450mm to 1000mm.
- Allows step measurement
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.
- For the details of the Absolute scale and its function, refer to page D-8.



500-502-10

500-501-10

500-500-10

### SPECIFICATIONS

Metric				
Order No.	Range	Depth bar	Fine adjustment	Remarks
500-500-10	0 - 450mm	—	—	—
500-501-10	0 - 600mm			
500-502-10	0 - 1000mm			

\* without SPC data output

Inch/Metric				
Order No.	Range	Depth bar	Fine adjustment	Remarks
500-505-10	0 - 18"	—	—	—
500-506-10	0 - 24"			
500-507-10	0 - 40"			

\* without SPC data output

### Technical Data

Accuracy:  $\pm 0.05\text{mm}$  ( $\leq 600\text{mm}$ ),  $\pm 0.07\text{mm}$  ( $\leq 1000\text{mm}$ )  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Repeatability: 0.01mm  
Display: LCD  
Scale type: ABSOLUTE electrostatic capacity linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc, **938882**,  
for initial operational checks (standard accessory))  
Battery life: Approx. 3.5 years under normal use  
Max. response speed: Unlimited


### DIMENSIONS

Range	A	B	C	D	H	L	Outside jaw width
0-450mm	38	47	35.9	90	25	630	6
0-600mm						780	
0-1000mm	50	60	49.8	130	32	1240	

### Optional accessories

Dedicated for the models equipped with a digimatic output function. For details, refer to page D-39.

#### 959143: Data hold unit

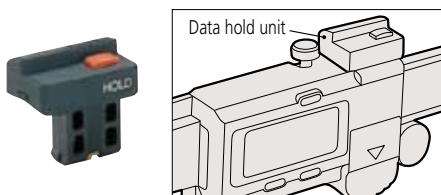

#### Connecting cables for IT/DP/MUX\*

- 959149: SPC cable with data button (1m)
- 959150: SPC cable with data button (2m)



#### USB Input Tool Direct

- 06ADV380C: SPC cable for USB-ITN-C (2m)

#### Connecting cables for U-WAVE-T

- 02AZD790C: SPC cable for U-WAVE with data button (160mm)
- 02AZE140C: SPC cable for footswitch





An inspection certificate is supplied as standard. Refer to page X for details.

**Technical Data**



Accuracy: ±0.02mm (excluding quantizing error)  
 Resolution: 0.01mm or .0005"/0.01mm  
 Repeatability: 0.01mm  
 Display: LCD  
 Scale type: ABSOLUTE electrostatic capacity linear encoder  
 Power supply: Solar cell\*  
 Max. response speed: Unlimited  
 Operational temperature: 0 to 40°C  
 \* Can be used continuously above 60lux ambient illumination

**Functions**

Absolute measurement  
 Scale contamination detection  
 Data output (use together with optional connecting cable)  
 Data hold (use optional hold unit. This cannot be used with the data output function)  
 \* For details of the function, refer to page D-8.

**ABSOLUTE Solar Caliper  
 SERIES 500 — No battery or origin reset needed**

- Mitutoyo's Absolute Solar Digimatic Caliper retains its origin point indefinitely.
- At 60 Lux and above the ABSOLUTE solar caliper is ready to start measurement. No more repeated zero setting caused by a shortage of light.
- An ABSOLUTE scale is incorporated so that zero setting is not required at each power ON. No danger of overspeed errors.
- Slider operation is smooth and comfortable.
- Allows step measurement.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.

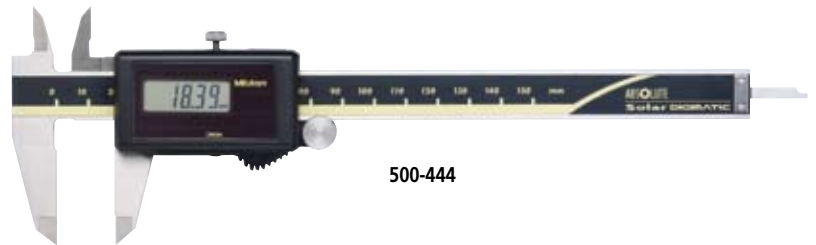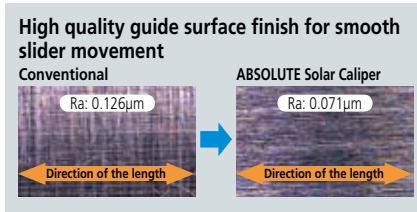

500-444

**SPECIFICATIONS**

Metric			
Order No.	Range	Depth bar	Fine adjustment
500-443	0 - 100mm	∅1.9mm rod	with thumb roller
500-453*	0 - 150mm	Blade	
500-444			
500-454*	0 - 200mm	Blade	
500-445			
500-455*			

\* without SPC data output

Inch/Metric			
Order No.	Range	Depth bar	Fine adjustment
500-463	0 - 4"	.075" rod	with thumb roller
500-473*	0 - 6"	Blade	
500-464			
500-474*	0 - 8"	Blade	
500-465			
500-475*			

\* without SPC data output

**DIMENSIONS**

Range	A	B	C	D	H	L
0-100mm	16.5	21	14.5	40	16	182
0-150mm						233
0-200mm	20	24.5	18	50		290

Jaw thickness: 3.5mm

**Optional accessories**

Dedicated for the models equipped with a digimatic output function. For details, refer to page D-39.

**959143: Data hold unit**



**Connecting cables for IT/DP/MUX\***

- 959149: SPC cable with data button (1m)
- 959150: SPC cable with data button (2m)



**USB Input Tool Direct**

- 06ADV380C: SPC cable for USB-ITN-C (2m)

**Connecting cables for U-WAVE-T**



- 02AZD790C: SPC cable for U-WAVE with data button (160mm)
- 02AZE140C: SPC cable for footswitch

# Calipers


An industry standard in measuring tools

## Vernier Caliper 530 Series — Standard model


- Plain and basic design.
- Stepped graduation face prevents dust ingress between the main scale and slider.
- The small vernier face angle (14°) provides easy reading.
- Can measure outside and inside dimensions, depth, and steps.
- Carbide-tipped jaw calipers are optimal for rough finished parts, castings, grinding stones, etc.
- Decimal and fractional graduated scales (metric/inch and inch models only).

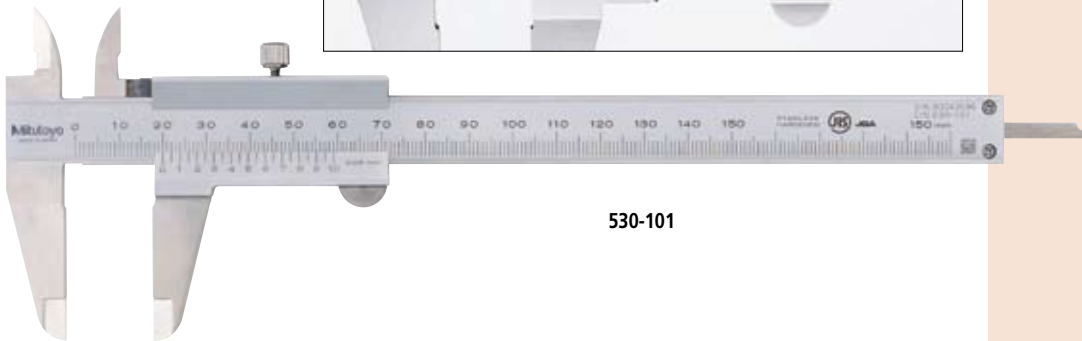

530-101

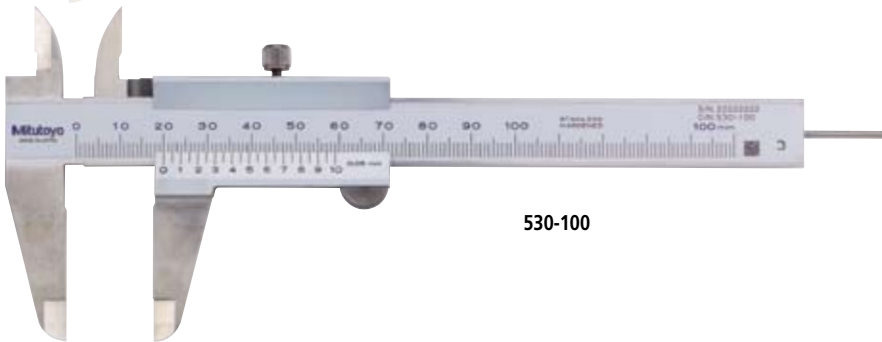

530-100



530-102 (Round depth bar type)



530-320 (Carbide-tipped jaw type)

### DIMENSIONS

Unit: mm

Range	Outside jaw thickness
0 - 100mm	3
0 - 150mm	
0 - 200mm	
0 - 300mm	3.8
0 - 600mm	6
0 - 1000mm	8

Range	A	B	D	E	F	H	L
0 - 100mm	17	21.5	40	53.5	30	16	182
0 - 150mm	17	21.5	40	53.5	30	16	229
0 - 200mm	20.5	25	50	53.5	30	16	288
0 - 300mm	22	27.5	64	66.5	36	20	404
0 - 600mm	38	47	90	89	50	25	780
0 - 1000mm	50	60	130	111	61	32	1240

\* Code No.530-100 and No.530-102 incorporate a round depth bar (ø1.9mm).  
The depth bar shown in the illustration above is a different type.

## Technical Data

Accuracy:  $\pm 0.05\text{mm}$  ( $\leq 200\text{mm}$ ),  $\pm 0.08\text{mm}$  ( $\leq 300\text{mm}$ )  
 $\pm 0.10\text{mm}$  ( $\leq 600\text{mm}$ ),  $\pm 0.15\text{mm}$  ( $\leq 1000\text{mm}$ )  
 High accuracy type:  
 $\pm 0.03\text{mm}$  ( $\leq 200\text{mm}$ ),  $\pm 0.04\text{mm}$  ( $\leq 300\text{mm}$ )  
 Graduation:  $0.05\text{mm}$ ,  $0.05\text{mm}$  ( $1/128''$ ) or  $.001''$  ( $1/128''$ )  
 High accuracy type:  
 $0.02\text{mm}$  or  $0.02\text{mm}$  ( $.001''$ )

## SPECIFICATIONS

Metric				
Order No.	Range	Depth bar	Remarks	
530-100	0 - 100mm	ø1.9mm rod	—	
530-102			—	
530-101	0 - 150mm	Blade	—	
530-320			Carbide-tipped jaws for outside measurement	
530-335			Carbide-tipped jaws for outside and inside measurement	
530-122*			High accuracy model: $\pm 0.03\text{mm}$	
530-108			—	
530-321	0 - 200mm	Blade	Carbide-tipped jaws for outside measurement	
530-123*			High accuracy model: $\pm 0.03\text{mm}$	
530-109			—	
530-322	0 - 300mm	Blade	Carbide-tipped jaws for outside measurement	
530-124*			High accuracy model: $\pm 0.04\text{mm}$	
530-501	0 - 600mm	—	—	
530-502	0 - 1000mm		—	

\* Graduation: 0.02mm

Metric/Inch with metric/inch double scale				
Order No.	Range	Depth bar	Inch graduation	Remarks
530-104	0 - 150mm	Blade	1/128"	—
530-316			1/128"	Clamping screw below the slider
530-312*			.001"	High accuracy model: $\pm 0.03\text{mm}$
530-114	0 - 200mm	Blade	1/128"	—
530-118*			.001"	High accuracy model: $\pm 0.03\text{mm}$
530-115	0 - 300mm	Blade	1/128"	—
530-119*			.001"	High accuracy model: $\pm 0.04\text{mm}$

\* Graduation: 0.02mm


Inch with inch/inch double scale				
Order No.	Range	Depth bar	Inch graduation	Remarks
530-105	0 - 6"	Blade	1/128"	—
530-116	0 - 8"			

## Measurement Applications

### 1. Outside measurement




### 2. Inside measurement

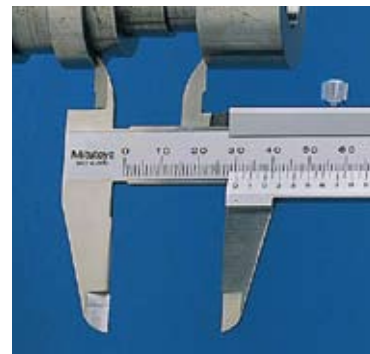

### 3. Step measurement



### 4. Depth measurement

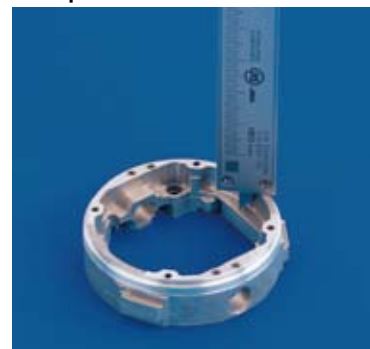


# Calipers

An industry standard in measuring tools

## Vernier Caliper 532 Series — with fine adjustment

- Fine-adjustment aids slider positioning.
- Allows step measurement.

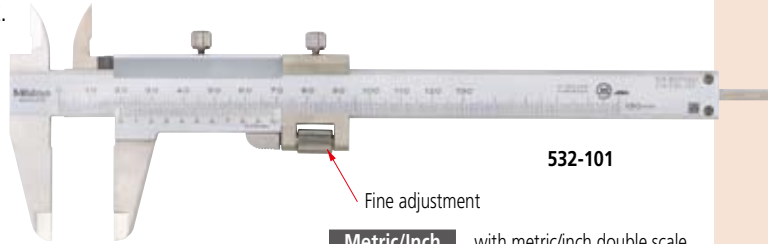

532-101

Fine adjustment

### Technical Data


Accuracy:  $\pm 0.03\text{mm}$  ( $\leq 180\text{mm}$ ),  $\pm 0.04\text{mm}$  ( $\leq 280\text{mm}$ )  
Graduation: 0.02mm, 0.02mm (.001") or .001" (1/128")

### SPECIFICATIONS

Metric				
Order No.	Range	Depth bar	Remarks	
532-101	0 - 130mm	Blade	with fine adjustment	
532-102	0 - 180mm			
532-103	0 - 280mm			


Metric/Inch with metric/inch double scale					
Order No.	Range	Depth bar	Inch graduation	Remarks	
532-119	0 - 130mm	Blade	.001"	with fine adjustment	
532-120	0 - 180mm				
532-121	0 - 280mm				

### DIMENSIONS

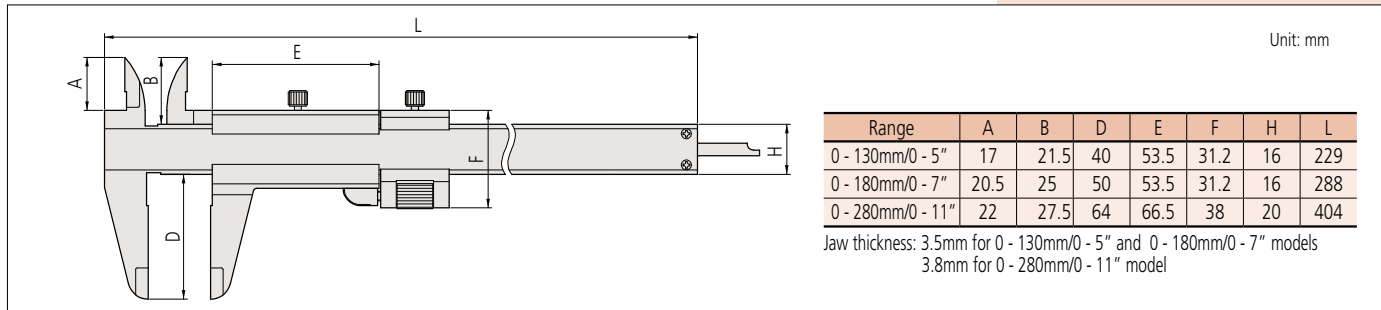

## Vernier Caliper 531 Series — with thumb clamp

- The slider moves only when the spring-loaded thumb grip is depressed.
- Allows step measurement.

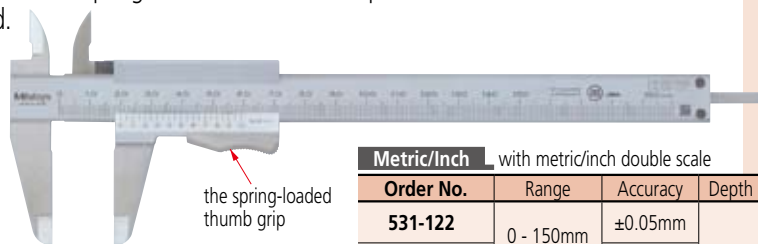

531-101

the spring-loaded thumb grip

### Technical Data

Accuracy: Refer to the list of specifications.  
Graduation: 0.05mm, 0.05mm (1/128") or .001" (1/128")  
High accuracy type:  
0.02mm or 0.02mm (.001")

### SPECIFICATIONS


Metric				
Order No.	Range	Accuracy	Depth bar	Remarks
531-101	0 - 150mm	$\pm 0.05\text{mm}$	Blade	—
531-102	0 - 200mm			
531-103	0 - 300mm			



\* Graduation: 0.02mm

Metric/Inch with metric/inch double scale					
Order No.	Range	Accuracy	Depth bar	Inch graduation	Remarks
531-122	0 - 150mm	$\pm 0.05\text{mm}$	Blade	1/128"	with inch/mm conversion label
531-128*		$\pm 0.03\text{mm}$		.001"	High accuracy model
531-108	0 - 200mm	$\pm 0.05\text{mm}$		1/128"	—
531-129*		$\pm 0.03\text{mm}$		.001"	High accuracy model
531-109	0 - 300mm	$\pm 0.08\text{mm}$		1/128"	—
531-112*		$\pm 0.04\text{mm}$		.001"	High accuracy model

\* Graduation: 0.02mm

### DIMENSIONS

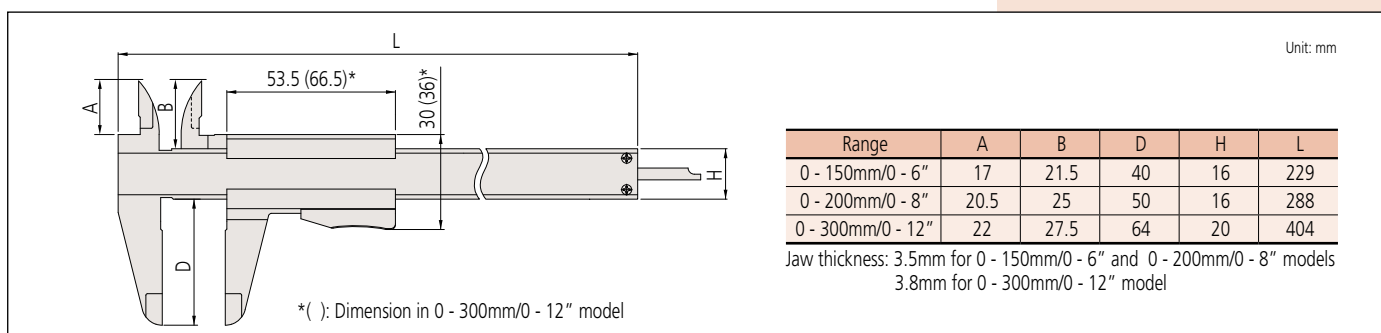



Radiused jaws for accurate ID measurement

**Technical Data**

Accuracy: Refer to the list of specifications. (excluding quantizing error for digital models)  
 Resolution: 0.01mm or .0005"/0.01mm  
 Display: LCD  
 Scale type: ABSOLUTE electromagnetic induction linear encoder  
 Max. response speed: Unlimited  
 Battery: **SR44** (1 pc), **938882**, for initial operational checks (standard accessory)  
 Battery life: Approx. 3 years under normal use (1 year: 300mm models) (3.5 years: over 300mm models)  
 Dust/Water protection level: IP67\* (models up to 300mm)  
 \*This model is not waterproof type. Therefore, rustproofing shall be applied after use.

**Optional accessories**

For details, refer to page D-39.  
**959143**: Data hold unit  
 Connecting cables for IT/DP/MUX  
**05CZA624**: SPC cable with data button (1m)\*  
**05CZA625**: SPC cable with data button (2m)\*




**959149**: SPC cable with data button (1m)  
**959150**: SPC cable with data button (2m)  
 USB Input Tool Direct  
**06ADV380A**: SPC cable for USB-ITN-A (2m)\*  
**06ADV380C**: SPC cable for USB-ITN-C (2m)  
 Connecting cables for U-WAVE-T  
**02AZD790A**: SPC cable for U-WAVE with data button (160mm)\*  
**02AZE140A**: SPC cable for footswitch\*  
**02AZD790C**: SPC cable for U-WAVE with data button (160mm)  
**02AZE140C**: SPC cable for footswitch  
 \* For IP67 models (up to 300mm)

**ABSOLUTE Digimatic Caliper 550 Series — with Nib Style Jaws**

- Offers a resolution of 0.01mm with corresponding accuracy.
- Incorporates an Absolute measurement system. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Code Nos. 550-301-10, 550-331-10, 550-311-10 and 550-341-10: IP67 (These models are not a waterproof type. Therefore a rustproofing shall be applied after use.)
- Allows integration into statistical process control and measurement systems for models

with measurement data output connector. Refer to page A-3.

- ID measurement value: displayed value + (the minimum inside measurement value mentioned below). OFFSET switch allows to input a compensation value so that the measurement value can be read directly (Code Nos. 550-301-10, 550-331-10, 550-311-10 and 550-341-10). Preset function allows to set a desired starting point (Code Nos. 550-331-10 and 550-341-10).

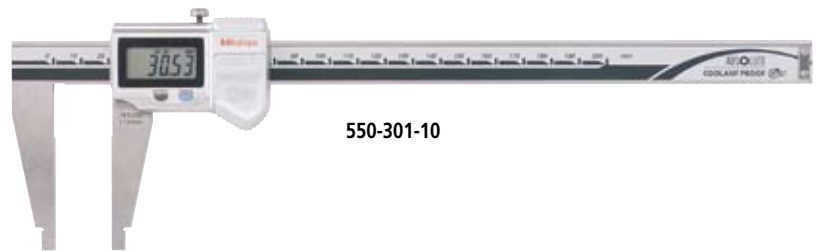

550-301-10

**SPECIFICATIONS**

Metric			
Order No.	Range*	Accuracy	Remarks
<b>550-301-10</b>	0 - 200mm (10.1 - 210mm)	±0.03mm	IP67
<b>550-331-10</b>	0 - 300mm (10.1 - 310mm)	±0.04mm	IP67, with offset/preset function for easy inside measurement
<b>550-203-10</b>	0 - 450mm (20.1 - 470mm)	±0.05mm	—
<b>550-205-10</b>	0 - 600mm (20.1 - 620mm)	±0.05mm	—
<b>550-207-10</b>	0 - 1000mm (20.1 - 1020mm)	±0.07mm	—

\* ( ) : Inside measurement  
 Note: Series 550 is not equipped with a depth bar.

Inch/Metric			
Order No.	Range*	Accuracy	Remarks
<b>550-311-10</b>	0 - 8" (.404" - 8.4")	±.0015"	IP67
<b>550-341-10</b>	0 - 12" (.404" - 12.4")	±.002"	IP67, with offset/preset function for easy inside measurement
<b>550-223-10</b>	0 - 18" (.504" - 18.5")		—
<b>550-225-10</b>	0 - 24" (.504" - 24.5")		—
<b>550-227-10</b>	0 - 40" (.504" - 40.2")		—

\* ( ) : Inside measurement  
 Note: Series 550 is not equipped with a depth bar.

**DIMENSIONS**

Range	D	J	S	R
0 - 200mm	60	40.5	8	5
0 - 300mm	75	50.5	12	5
0 - 450mm	100	65	18	10
0 - 600mm	100	65	18	10
0 - 1000mm	140	95	24	10

Jaw thickness: 3mm for 0 - 200mm model  
 3.8mm for 0 - 300mm model  
 6mm for 0 - 450mm and 0 - 600mm models  
 8mm for 0 - 1000mm model

Unit: mm




# Calipers

An industry standard in measuring tools

## ABSOLUTE Digimatic Caliper 551 Series - with Nib Style and Standard Jaws

- Offers a resolution of 0.01mm with corresponding accuracy.
- Incorporates an Absolute measurement system. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.
- ID measurement value: displayed value + (the minimum inside measurement value mentioned below). OFFSET switch allows to input a compensation value so that the measurement value can be read directly (Code No. 551-301-10, 551-331-10, 551-311-10 and 551-341-10). Preset function allows to set a desired starting point (Code No. 551-331-10 and 551-341-10).
- Tips of the outside measurement jaw are relieved for easy measurement of thin parts.

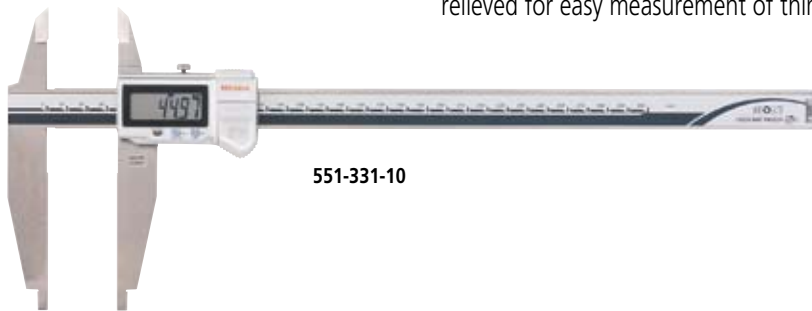

### SPECIFICATIONS

Metric			
Order No.	Range*	Accuracy	Remarks
551-301-10	0 - 200mm (10.1 - 210mm)	±0.03mm	IP67
551-331-10	0 - 300mm (10.1 - 310mm)	±0.04mm	IP67, with offset/preset function for easy inside measurement
551-204-10	0 - 500mm (20.1 - 520mm)	±0.06mm	—
551-206-10	0 - 750mm (20.1 - 770mm)	±0.06mm	
551-207-10	0 - 1000mm (20.1 - 1020mm)	±0.07mm	

\* ( ) : inside measurement  
Note: Series 551 is not equipped with a depth bar.


Inch/Metric			
Order No.	Range*	Accuracy	Remarks
551-311-10	0 - 8" (.404" - 8.4")	±.0015"	IP67
551-341-10	0 - 12" (.404" - 12.4")	±.002"	IP67, with offset/preset function for easy inside measurement
551-224-10	0 - 20" (.504" - 20.5")	±.0025"	—
551-226-10	0 - 30" (.504" - 30.5")	±.0025"	
551-227-10	0 - 40" (1.004" - 41")	±.003"	

\* ( ) : inside measurement  
Note: Series 551 is not equipped with a depth bar.

### DIMENSIONS

Range	A	D	J	S
0 - 200mm	30	60	43	8
0 - 300mm	40.1	90	68	10
0 - 500mm	56	150	115	15
0 - 750mm	56	150	115	15
0 - 1000mm	56	150	115	20

Jaw thickness: 3mm for 0 - 200mm model  
3.8mm for 0 - 300mm model  
6mm for 0 - 500mm and 0 - 750mm models  
8mm for 0 - 1000mm model




ABSOLUTE™ (Refer to page X for details.)

IP67 (Refer to page X for details.)



(Refer to page X for details.)



Radiused jaws for accurate ID measurement

### Technical Data

Accuracy: Refer to the list of specifications. (excluding quantizing error for digital models)  
Resolution: 0.01mm or .0005"/0.01mm  
Display: LCD  
Scale type: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**, for initial operational checks (standard accessory)  
Battery life: Approx. 3 years under normal use (1 year: 300mm models) (3.5 years: over 300mm models)  
Dust/Water protection level: IP67\* (models up to 300mm)  
\*This model is not waterproof type. Therefore, rustproofing shall be applied after use.

### Optional accessories

For details, refer to page D-39.  
**959143**: Data hold unit  
Connecting cables for IT/DP/MUX  
**05CZA624**: SPC cable with data button (1m)\*  
**05CZA625**: SPC cable with data button (2m)\*



**959149**: SPC cable with data button (1m)  
**959150**: SPC cable with data button (2m)  
USB Input Tool Direct  
**06ADV380A**: SPC cable for USB-ITN-A (2m)\*  
**06ADV380C**: SPC cable for USB-ITN-C (2m)  
Connecting cables for U-WAVE-T  
**02AZD790A**: SPC cable for U-WAVE with data button (160mm)\*  
**02AZE140A**: SPC cable for footswitch\*  
**02AZD790C**: SPC cable for U-WAVE with data button (160mm)  
**02AZE140C**: SPC cable for footswitch  
\* For IP67 models (up to 300mm)



An inspection certificate is supplied as standard.  
Refer to page X for details.

## Dial Caliper Series 505

- Newly designed dial movement for ultra-smooth sliding and high shock protection.
- Easy-to-read yellow dial.
- Large finger-rest aids ease-of-use.
- Jaw tips are relieved for easy measurement of thin parts.
- Allows step measurement.



505-730



505-731



505-745

Reading	
(A) Main scale reading	22. mm
(B) Dial reading	.00mm
	22.00mm

### SPECIFICATIONS

Metric				
Order No.	Range	Accuracy	Graduation	Remarks
505-730	0 - 150mm	±0.03mm	0.02mm, 2mm/rev	Carbide-tipped jaws for outside measurement
505-734				
505-735				Carbide-tipped jaws for outside and inside measurement
505-732*	0 - 200mm	±0.02mm	0.01mm, 1mm/rev	—
505-731				
505-733*				
505-745	0 - 300mm	±0.04mm	0.02mm, 2mm/rev	

\* Silver cover type


Inch				
Order No.	Range	Accuracy	Graduation	Remarks
505-740J / 505-742J*	0 - 6"	±.001"	.001", .1"/rev	Carbide-tipped jaws for outside measurement
505-736*		±.001"		
505-738*		±.001"		Carbide-tipped jaws for outside and inside measurement
505-744		±.001"		Carbide-tipped jaws for outside measurement
505-741J / 505-743J*	0 - 8"	±.002"	.001", .1"/rev	—
505-737*		±.002"		Carbide-tipped jaws for outside measurement
505-739*		±.002"		Carbide-tipped jaws for outside and inside measurement
505-749	0 - 12"	±.002"	.001", .2"/rev	—
505-746*		±.002"	.001", .1"/rev	
505-750		±.002"	.001", .2"/rev	Carbide-tipped jaws for outside measurement
505-747*		±.002"	.001", .1"/rev	Carbide-tipped jaws for outside and inside measurement
505-748*		±.002"	.001", .1"/rev	Carbide-tipped jaws for outside and inside measurement

\* Silver cover type

# Calipers

An industry standard in measuring tools

## DIMENSIONS

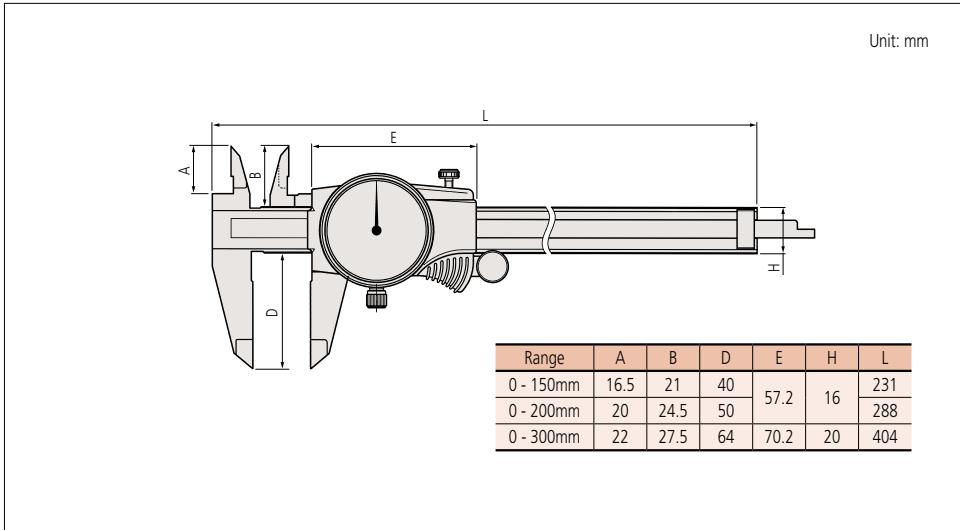

D

**ABSOLUTE™** (Refer to page X for details.)

**IP66** (Refer to page X for details.)

**TÜVRheinland  
CERTIFIED**  
www.tuv.com  
ID 0000022582

## ABSOLUTE Coolant Proof Carbon Fiber Caliper SERIES 552 — with Standard jaws

- IP66 Absolute Digital Caliper (Refer to page D-8 for Absolute function.)
- Lightweight Digimatic Calipers that employ CFRP (Carbon Fiber Reinforced Plastics) in the beam and jaws.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.



552-303-10

### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Material of jaws: Stainless Steel Hardened  
Display: LCD  
Scale type: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 5,000 hours in continuous use  
Dust/Water protection level: IP66 (IEC60529)\*  
Standard accessory: Jaw clamps (2 pcs.), 05GZA033  
\* This model is not waterproof type. Please wipe away the wet after use.

### Functions

Zero-setting  
Data hold  
Offsetting  
Presetting  
Data output  
Low-power and low-voltage alert  
Counting value composition error  
Automatic power on/off, inch/mm reading  
(inch/mm models)

### SPECIFICATIONS

Metric			
Order No.	Range*	Accuracy	
<b>552-302-10</b>	0 - 450mm (20.1 - 470mm)	±0.04mm	
<b>552-303-10</b>	0 - 600mm (20.1 - 620mm)	±0.04mm	
<b>552-304-10</b>	0 - 1000mm (20.1 - 1020mm)	±0.05mm	
<b>552-305-10</b>	0 - 1500mm (20.1 - 1520mm)	±0.09mm	
<b>552-306-10</b>	0 - 2000mm (20.1 - 2020mm)	±0.12mm	

\* ( ) : Dimension in inside measurement

Inch/Metric			
Order No.	Range*	Accuracy	
<b>552-312-10</b>	0 - 18" (.504 - 18.5")	±.002"	
<b>552-313-10</b>	0 - 24" (.504 - 24.5")	±.002"	
<b>552-314-10</b>	0 - 40" (1.004 - 40.5")	±.002"	
<b>552-315-10</b>	0 - 60" (1.004 - 60.5")	±.004"	
<b>552-316-10</b>	0 - 80" (1.004 - 80.5")	±.005"	

\* ( ) : Dimension in inside measurement

### DIMENSIONS

Unit: mm
















Range	D	E	G	H	J	L	N	R	S	t	U
0-450mm (0-18")	100	91.8	35	25	65	640	41.2	R10	18	8	10 (.25")
0-600mm (0-24")	100	91.8	35	25	65	790	41.2	R10	18	8	10 (.25")
0-1000mm (0-40")	150	113.8	45	32	100	1230	62.8	R10	24	8	10 (.5")
0-1500mm (0-60")	150	113.8	45	32	100	1740	62.8	R10	24	8	10 (.5")
0-2000mm (0-80")	150	113.8	45	32	100	2250	62.8	R10	24	8	10 (.5")

# Calipers

An industry standard in measuring tools

## Optional accessories

Metric		
	No. 552-302-10, 552-155-10, 552-303-10 and 552-156-10.	No. 552-304-10 and 552-305-10
Clamp box (1 pair)	No.914053	No.914054
Distance measurement jaw (1 pair)	No.914055	
Point ID measuring attachment	No.914057	
Inch/Metric		
	No. 552-312-10, 552-165-10, 552-313-10 and 552-166-10	No. 552-314-10, 552-315-10, 552-316-10
Clamp box (1 pair)	No.914053	No.914054
Distance measurement jaw (1 pair)	No.914056	
Point ID measuring attachment	No.914058	

 <p>Distant measurement jaw</p>	<p>Clamp box</p> 				
 <p>Point ID measuring attachment</p>	<table border="1"> <tbody> <tr> <td data-bbox="566 1043 849 1249"> <p>Distance measurement jaw</p> <p>Accuracy: <math>\pm 0.03\text{mm}</math></p>  </td> <td data-bbox="849 1043 1040 1249">  <p>(Range: 10.1 - )</p> </td> </tr> <tr> <td data-bbox="566 1249 849 1460"> <p>Point ID measuring attachment</p> <p>Accuracy: <math>\pm 0.02\text{mm}</math></p>  </td> <td data-bbox="849 1249 1040 1460">  <p>(Range: 50.1 - )</p> </td> </tr> </tbody> </table>	<p>Distance measurement jaw</p> <p>Accuracy: <math>\pm 0.03\text{mm}</math></p> 	 <p>(Range: 10.1 - )</p>	<p>Point ID measuring attachment</p> <p>Accuracy: <math>\pm 0.02\text{mm}</math></p> 	 <p>(Range: 50.1 - )</p>
<p>Distance measurement jaw</p> <p>Accuracy: <math>\pm 0.03\text{mm}</math></p> 	 <p>(Range: 10.1 - )</p>				
<p>Point ID measuring attachment</p> <p>Accuracy: <math>\pm 0.02\text{mm}</math></p> 	 <p>(Range: 50.1 - )</p>				

## Optional accessories

For details, refer to page D-39.

Connecting cables for **IT/DP/MUX**

**05CZA624**: SPC cable with data button (1m)

**05CZA625**: SPC cable with data button (2m)



## USB Input Tool Direct

**06ADV380A**: SPC cable for **USB-ITN-A** (2m)

Connecting cables for **U-WAVE-T**

**02AZD790A**: SPC cable for U-WAVE with data button (160mm)

**02AZE140A**: SPC cable for footswitch



**ABSOLUTE™** (Refer to page X for details.)

**IP66** (Refer to page X for details.)

**TÜVRheinland  
CERTIFIED** (Refer to page X for details.)  
www.tuv.com  
ID 0000022582

## ABSOLUTE Coolant Proof Carbon Fiber Caliper SERIES 552 - with Long Jaws

- IP66 Absolute Digital Caliper (Refer to page D-8 for a description of Absolute measurement.)
- Lightweight Digimatic Calipers that employ CFRP (Carbon Fiber Reinforced Plastics) in the beam and jaws.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.



552-151-10

### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Material of jaws: Stainless Steel Hardened  
Display: LCD  
Scale type: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 5,000 hours in continuous use  
Dust/Water protection level: IP66 (IEC 60529)\*  
Standard accessory: Jaw clamps (2 pcs.), 05GZA033  
\*This model is not waterproof type. Please wipe away the wet after use.

### Functions

Zero-setting  
Data hold  
Offsetting  
Presetting  
Data output  
Low-power and low-voltage alert  
Counting value composition error  
Automatic power on/off, inch/mm reading  
(inch/mm models)

### Optional accessories

For details, refer to page D-39.  
Connecting cables for **IT/DP/MUX**  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)



### USB Input Tool Direct

**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for U-WAVE with data button  
(160mm)  
**02AZE140A**: SPC cable for footswitch

## SPECIFICATIONS


Metric		
Order No.	Range*	Accuracy
<b>552-150-10</b>	0 - 450mm (20.1 - 470mm)	±0.06mm
<b>552-151-10</b>	0 - 600mm (20.1 - 620mm)	
<b>552-152-10</b>	0 - 1000mm (20.1 - 1020mm)	±0.07mm
<b>552-153-10</b>	0 - 1500mm (20.1 - 1520mm)	±0.11mm
<b>552-154-10</b>	0 - 2000mm (20.1 - 2020mm)	±0.14mm

\* ( ) : Dimension in inside measurement

Inch/Metric		
Order No.	Range*	Accuracy
<b>552-160-10</b>	0 - 18" (.504 - 18.5")	±.0025"
<b>552-161-10</b>	0 - 24" (.504 - 24.5")	
<b>552-162-10</b>	0 - 40" (1.004 - 40.5")	±.003"
<b>552-163-10</b>	0 - 60" (1.004 - 60.5")	±.0045"
<b>552-164-10</b>	0 - 80" (1.004 - 80.5")	±.0055"

\* ( ) : Dimension in inside measurement

## DIMENSIONS

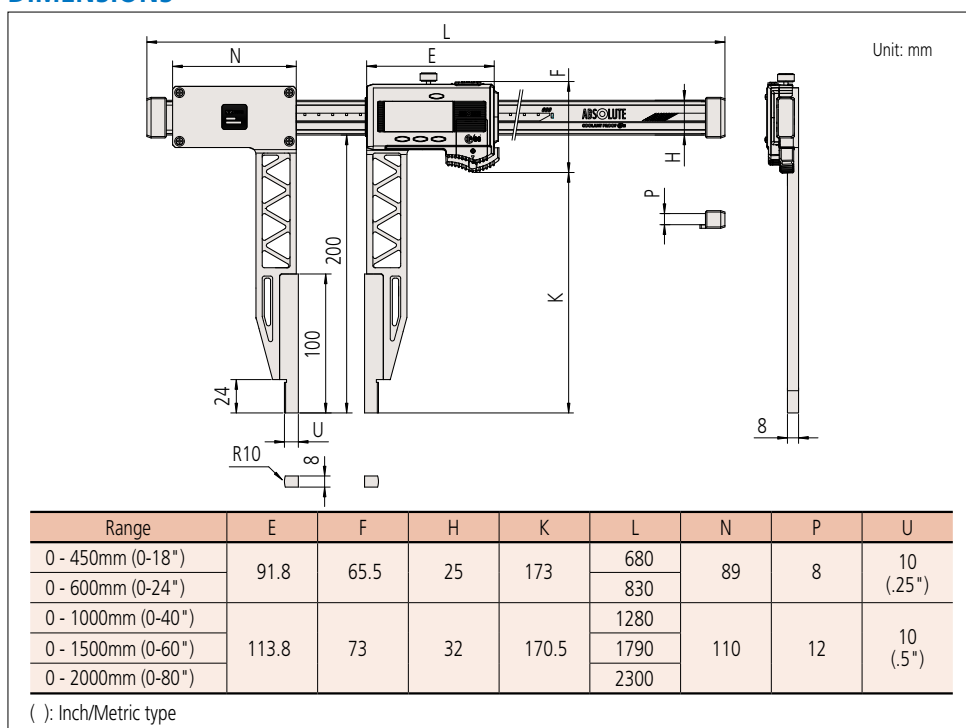


# Calipers

An industry standard in measuring tools

## ABSOLUTE Coolant Proof Carbon Fiber Caliper SERIES 552 - with Ceramic Jaws

- IP66 Absolute Digital Caliper (Refer to page D-8 for a description of Absolute measurement.)
- Lightweight Digimatic Calipers that employ CFRP (Carbon Fiber Reinforced Plastics) in the beam and jaws.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.
- The zirconia-ceramic jaws make this caliper suitable for measuring moderately magnetic workpieces. However, since steel is used in the main unit, it may not be suitable for measuring strongly magnetic workpieces.

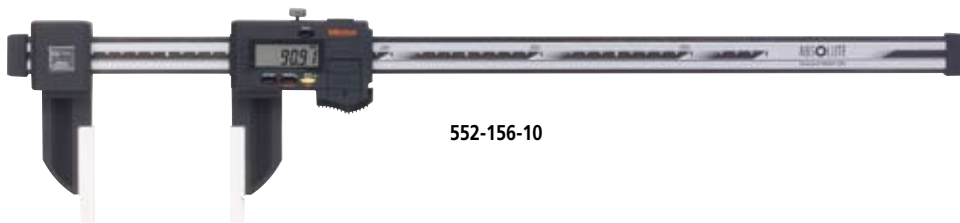

552-156-10

### SPECIFICATIONS

#### Metric

Order No.	Range*	Accuracy
552-155-10	0 - 450mm (20.1 - 470mm)	±0.04mm
552-156-10	0 - 600mm (20.1 - 620mm)	


\* ( ): Dimension in inside measurement

#### Inch/Metric

Order No.	Range*	Accuracy
552-165-10	0 - 18" (.504 - 18.5")	±.002"
552-166-10	0 - 24" (.504 - 24.5")	

\* ( ): Dimension in inside measurement

### DIMENSIONS

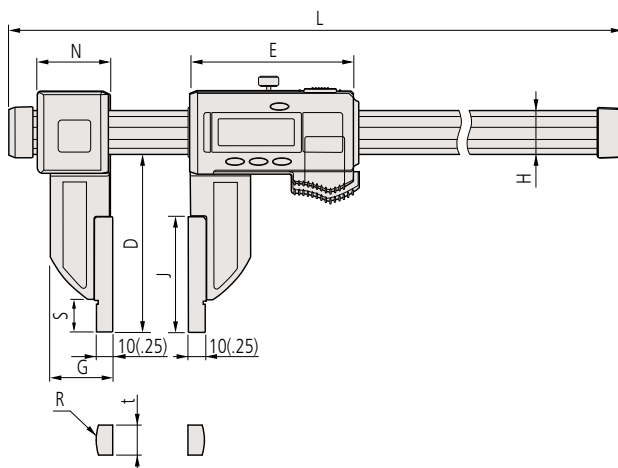

Unit: mm

Range	D	E	G	H	J	L	N	R	S	t
0-450mm (0-18")	100	91.8	35	25	65	640	41.2	R10	18	8
0-600mm (0-24")	100	91.8	35	25	65	790	41.2	R10	18	8

( ): Inch/Metric type

**ABSOLUTE™** (Refer to page X for details.)



(Refer to page X for details.)



(Refer to page X for details.)

### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Material of jaws: Ceramic  
Display: LCD  
Scale type: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 5,000 hours in continuous use  
Dust/Water protection level: IP66 (IEC 60529)\*  
Standard accessory: Jaw clamps (2 pcs.), 05GZA033  
\*This model is not waterproof type. Please wipe away the wet after use.

### Functions

Zero-setting  
Data hold  
Offsetting  
Presetting  
Data output  
Low-power and low-voltage alert  
Counting value composition error  
Automatic power on/off, inch/mm reading  
(inch/mm models)

### Optional accessories

For details, refer to page D-39.  
Connecting cables for **IT/DP/MUX**  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)



### USB Input Tool Direct

**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for U-WAVE with data button  
(160mm)  
**02AZE140A**: SPC cable for footswitch

**ABSOLUTE™** (Refer to page X for details.)

**IP66**


(Refer to page X for details.)



(Refer to page X for details.)

## ABSOLUTE Coolant Proof Carbon Fiber Caliper SERIES 552 - with Interchangeable Jaws

- IP66 Absolute Digital Caliper (Refer to page D-8 for a description of Absolute measurement.)
- The range of applications can be expanded by using interchangeable jaws (optional).
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.
- Provided with preset function for setting a desired starting point, which allows direct readout of offset measurement.

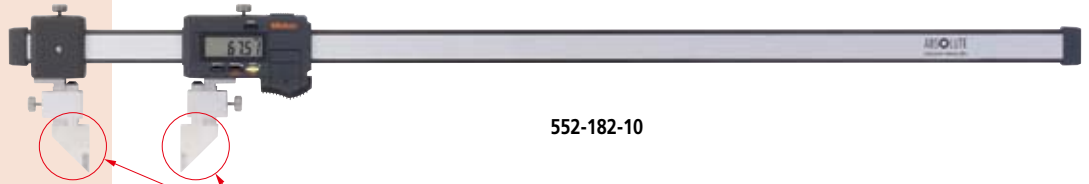


### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Display: LCD  
Scale type: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 5,000 hours in continuous use  
Dust/Water protection level: IP66 (IEC 60529)\*  
Standard accessory: Jaw clamps (2 pcs.), 05GZA033  
\* Although these models are IP66 rated, care should be taken to dry tool after use.

### Functions

Zero-setting  
Data hold  
Offsetting  
Presetting  
Data output  
Low-power and low-voltage alert  
Counting value composition error  
Automatic power on/off, inch/mm reading  
(inch/mm models)

### Standard accessories (2 pcs)



Jaw clamps: No.05GZA033

### Optional accessories

For details, refer to page D-39.  
Connecting cables for **IT/DP/MUX**  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)



### USB Input Tool Direct

**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for U-WAVE with data button  
(160mm)  
**02AZE140A**: SPC cable for footswitch

### SPECIFICATIONS

Metric		
Order No.	Range	Accuracy
<b>552-181-10</b>	0 - 450mm	±0.04mm
<b>552-182-10</b>	0 - 600mm	
<b>552-183-10</b>	0 - 1000mm	±0.05mm
<b>552-184-10</b>	0 - 1500mm	±0.09mm
<b>552-185-10</b>	0 - 2000mm	±0.12mm

Inch/Metric		
Order No.	Range	Accuracy
<b>552-191-10</b>	0 - 18"	±.002"
<b>552-192-10</b>	0 - 24"	
<b>552-193-10</b>	0 - 40"	±.004"
<b>552-194-10</b>	0 - 60"	
<b>552-195-10</b>	0 - 80"	±.005"

# Calipers


An industry standard in measuring tools

## Optional accessories


Interchangeable jaws

### SPECIFICATIONS


#### Standard type




#### Inside point type




#### Surface Plate Type




#### Scriber Type



#### Centerline Type



#### Scriber for height gages



#### Standard Type

Order No.	Components	a	b
<b>07CZA056</b>	Right ( <b>07CAA044</b> ), Left ( <b>07CAA045</b> )	28mm (1.1")	30mm (1.2")

\* 1 set

#### Inside Point Type

Order No.	Components	a	b
<b>07CZA058</b>	<b>07CZA041</b> x 2pcs.	25mm	50mm
<b>07CZA059</b>	<b>07CZA048</b> x 2pcs.	1"	2"

#### Scriber Type

Order No.	Components	a	b
<b>07CZA055</b>	Right ( <b>07CZA042</b> ), Left ( <b>07CZA043</b> )	8mm	30mm
<b>07CZA061</b>	Right ( <b>07CZA042</b> ), Left ( <b>07CZA049</b> )	0.31"	1.2"

#### Surface Plate Type

Order No.	a	b
<b>07CZA044</b>	90mm (3.5")	28mm (1.1")

#### Centerline Type

Order No.	Components	a	b
<b>07CZA057</b>	<b>07CZA039</b> x 2pcs.	30mm	30mm
<b>07CZA060</b>	<b>07CZA047</b> x 2pcs.	1.2"	1.2"

Note: Entering the appropriate offset value enables the display to indicate the correct measurement value inscribed on the jaws, which should be installed so that this inscription is visible from the display side of the caliper.

#### Scriber for height gages

Order No.
<b>07GZA000</b>

Type	Applicable calipers	Range	Accuracy when attached to the caliper
Standard type	<b>552-181-10 (552-191-10)</b>	0 - 450mm (0-18")	±0.06mm (±0.025")
	<b>552-182-10 (552-192-10)</b>	0 - 600mm (0-24")	±0.07mm (±0.030")
	<b>552-183-10 (552-193-10)</b>	0 - 1000mm (0-40")	±0.07mm (±0.030")
	<b>552-184-10 (552-194-10)</b>	0 - 1500mm (0-60")	±0.11mm (±0.045")
Inside point type	<b>552-185-10 (552-195-10)</b>	0 - 2000mm (0-80")	±0.14mm (±0.055")
	<b>552-181-10 (552-191-10)</b>	Inside: 50.1-500mm (2.004-20") Outside: 0 - 450mm (0-18")	±0.09mm (±0.035")
	<b>552-182-10 (552-192-10)</b>	Inside: 50.1-650mm (2.004-26") Outside: 0 - 600mm (0-24")	
	<b>552-183-10 (552-193-10)</b>	Inside: 50.1-1050mm (2.004-42") Outside: 0 - 1000mm (0-40")	±0.10mm (±0.040")
Centerline type	<b>552-184-10 (552-194-10)</b>	Inside: 50.1-1550mm (2.004-62") Outside: 0 - 1500mm (0-60")	±0.14mm (±0.055")
	<b>552-185-10 (552-195-10)</b>	Inside: 50.1-2050mm (2.004-82") Outside: 0 - 2000mm (0-80")	±0.17mm (±0.070")
	<b>552-181-10 (552-191-10)</b>	30.1 - 480mm (1.204-19.2")	±0.08mm (±0.030")
	<b>552-182-10 (552-192-10)</b>	30.1 - 630mm (1.204-25.2")	
Scriber type	<b>552-183-10 (552-193-10)</b>	30.1 - 1030mm (1.204-41.2")	±0.09mm (±0.035")
	<b>552-184-10 (552-194-10)</b>	30.1 - 1530mm (1.204-61.2")	±0.13mm (±0.055")
	<b>552-185-10 (552-195-10)</b>	30.1 - 2030mm (1.204-81.2")	±0.16mm (±0.065")
	<b>552-181-10 (552-191-10)</b>	30 - 480mm (1.2-19.2") 30 - 630mm (1.2-25.2")	±0.10mm (±0.040")
Surface plate type + Scriber type for height gages	<b>552-183-10 (552-193-10)</b>	30 - 1030mm (1.2-41.2")	±0.11mm (±0.045")
	<b>552-184-10 (552-194-10)</b>	30 - 1530mm (1.2-61.2")	±0.15mm (±0.060")
	<b>552-185-10 (552-195-10)</b>	30 - 2030mm (1.2-81.2")	±0.18mm (±0.070")
	<b>552-181-10 (552-191-10)</b>	0 - 450mm (0-17.7") 0 - 600mm (0-23.7")	±0.10mm (±0.040")
Surface plate type + Inside point type	<b>552-183-10 (552-193-10)</b>	0 - 1000mm (0-39.4")	±0.11mm (±0.045")
	<b>552-184-10 (552-194-10)</b>	0 - 1500mm (0-59.4")	±0.15mm (±0.060")
	<b>552-185-10 (552-195-10)</b>	0 - 2000mm (0-79.6")	±0.18mm (±0.070")
	<b>552-181-10 (552-191-10)</b>	Inside: 25.1 - 475mm (1.004-19") Outside: 0 - 450mm (1-18")	±0.12mm (±0.050")
<b>552-182-10 (552-192-10)</b>	Inside: 25.1 - 625mm (1.004-25") Outside: 0 - 600mm (1-24")		
Surface plate type + Centerline type	<b>552-183-10 (552-193-10)</b>	Inside: 25.1 - 1025mm (1.004-41") Outside: 0 - 1000mm (1-40")	±0.13mm (±0.055")
	<b>552-184-10 (552-194-10)</b>	Inside: 25.1 - 1525mm (1.004-62") Outside: 0 - 1500mm (1-60")	±0.17mm (±0.070")
	<b>552-185-10 (552-195-10)</b>	Inside: 25.1 - 2025mm (1.004-81") Outside: 0 - 2000mm (1-80")	±0.20mm (±0.080")
	<b>552-181-10 (552-191-10)</b>	15 - 465mm (0.6-18.6")	±0.11mm (±0.045")
<b>552-182-10 (552-192-10)</b>	15 - 615mm (0.6-24.6")		
<b>552-183-10 (552-193-10)</b>	15 - 1015mm (0.6-40.6")		
Surface plate type + Centerline type	<b>552-184-10 (552-194-10)</b>	15 - 1515mm (0.6-60.6")	±0.12mm (±0.050")
	<b>552-185-10 (552-195-10)</b>	15 - 2015mm (0.6-80.6")	±0.19mm (±0.075")
	<b>552-181-10 (552-191-10)</b>	15 - 1515mm (0.6-60.6")	±0.16mm (±0.065")

( ): Inch/Metric models

### Application examples

<p><b>Surface plate type + Standard type</b></p>	<p><b>Scriber type</b></p>
<p><b>Inside point type</b></p>	<p><b>Surface plate type + Scriber for height gages</b></p>
<p><b>Surface plate type + Centerline type</b></p>	

## Vernier Caliper SERIES 160 — with Nib Style Jaws and Fine Adjustment



- Inside and outside measurements can be read directly from the upper and lower vernier scales.
- The jaws have radiused measuring faces for accurate inside diameter (ID) measurement.
- With fine adjustment (except for 160-130/131/132/133/134).



160-131

160-101

Fine adjustment



Radiused jaws for accurate ID measurement

### SPECIFICATIONS

**Metric** \_\_\_\_\_ with inside measurement vernier scale

Order No.	Range*	Accuracy	Graduations	Remarks
160-130	0 (20.1) - 450mm	±0.10mm	0.05mm	without fine adjustment
160-131	0 (20.1) - 600mm			
160-132	0 (20.1) - 1000mm			
160-133	0 (20.1) - 1500mm			
160-134	0 (20.1) - 2000mm			

\* ( ) : Minimum dimension in ID measurement

**Metric** \_\_\_\_\_ with inside measurement vernier scale

Order No.	Range*	Accuracy	Graduations	Remarks
160-127	0 (10.1) - 300mm	±0.04mm	0.02mm	with fine adjustment
160-128	0 (20.1) - 450mm	±0.05mm		
160-101	0 (20.1) - 600mm	±0.05mm		
160-104	0 (20.1) - 1000mm	±0.07mm		
160-110	0 (20.1) - 1500mm	±0.1mm		
160-113	0 (20.1) - 2000mm	±0.12mm		

\* ( ) : Minimum dimension in ID measurement

**Metric/Inch** \_\_\_\_\_ with metric/inch double scale

Order No.	Range*	Accuracy	Graduations	Remarks
160-150	0 (10.1) - 300mm	±0.04mm	0.02mm/.001"	+10mm/.394" to reading in inside measurement
160-151	0 (20.1) - 450mm	±0.05mm		
160-153	0 (20.1) - 600mm	±0.05mm		
160-155	0 (20.1) - 1000mm	±0.07mm		
160-157	0 (20.1) - 1500mm	±0.1mm		
160-159	0 (20.1) - 2000mm	±0.12mm		

\* ( ) : Minimum dimension in ID measurement

**Inch** \_\_\_\_\_ with inside measurement vernier scale

Order No.	Range*	Accuracy	Graduations	Remarks
160-124	0 (.304") - 12"	±.0015"	.001"	—
160-116	0 (.504") - 18"	±.002"		
160-102	0 (.504") - 24"			
160-105	0 (1.004") - 40"	±.003"		
160-111	0 (1.004") - 60"	±.004"		
160-114	0 (1.004") - 80"	±.005"		


\* ( ) : Minimum dimension in ID measurement

**Inch/Metric** \_\_\_\_\_ with inch/metric double scale

Order No.	Range*	Accuracy	Graduations	Remarks
160-125	0 (.304") - 12"	±.0015"	.001"/0.02mm	+3"/7.62mm to reading in inside measurement
160-119	0 (.504") - 18"	±.002"		
160-103	0 (.504") - 24"	±.002"		
160-106	0 (1.004") - 40"	±.003"		
160-112	0 (1.004") - 60"	±.004"		
160-115	0 (1.004") - 80"	±.005"		

\* ( ) : Minimum dimension in ID measurement

### DIMENSIONS

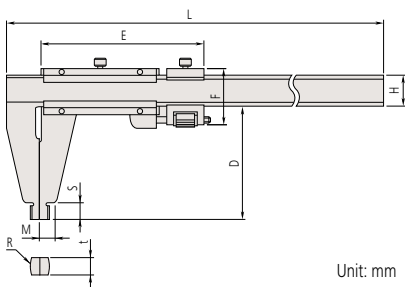

Unit: mm

Range	D	E	F	H	L	M	R	S	t
0-300mm/0-12"	75	103	38	20	445	10	R 5	12	3.8
0-450mm*	100	89	—	25	630	14.8	R10	18	6
0-450mm/0-18"	100	112	51	—	—	—	R10	18	6
0-600mm*	100	89	—	25	780	14.8	R10	18	6
0-600mm/0-24"	100	112	51	—	—	—	R10	18	6
0-1000mm*	140	111	—	32	1240	17	R10	24	8
0-1000mm/0-40"	140	150	62.5	—	—	—	R10	24	8
0-1500mm*	180	129	—	32	1800	19	R10	30	8
0-1500mm/0-60"	180	170	62.5	—	—	—	R10	30	8
0-2000mm*	180	129	—	40	2300	23	R10	30	12
0-2000mm/0-80"	180	180	78	—	—	—	R10	30	12

\*: without fine adjustment




# Calipers


An industry standard in measuring tools

## Long Jaw Vernier Caliper SERIES 534

- Long jaws for measuring hard-to-reach workpiece features.
- Inside and outside measurements can be read directly from the upper and lower vernier scales.

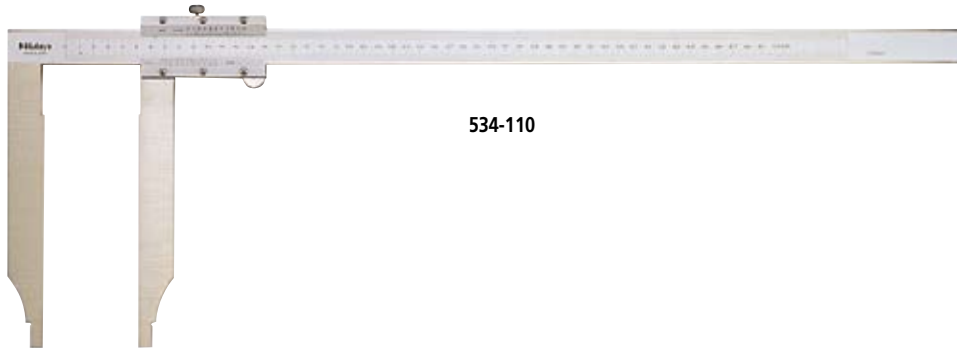

534-110



Round jaws for accurate ID measurement

## SPECIFICATIONS

**Metric** \_\_\_\_\_ with inside measurement vernier scale

Order No.	Range*	Accuracy	Graduation	Remarks
534-109	0 (10.1) - 300mm	±0.07mm	0.05mm	without fine adjustment
534-110	0 (20.1) - 500mm	±0.13mm		



\* ( ): Minimum dimension in inside measurement

**Metric/Inch** \_\_\_\_\_ with metric/inch double scale

Order No.	Range*	Accuracy	Graduation	Remarks
534-101	0 (10.1) - 300mm	±0.07mm	0.05mm/ 1/128"	+10mm/.394" to reading in inside measurement without fine adjustment
534-105		±0.04mm	0.02mm/.001"	
534-102	0 (20.1) - 500mm	±0.13mm	0.05mm/ 1/128"	+20mm/.787" to reading in inside measurement without fine adjustment
534-106		±0.06mm	0.02mm/.001"	
534-103	0 (20.1) - 750mm	±0.16mm	0.05mm/ 1/128"	
534-107		±0.08mm	0.02mm/.001"	
534-104	0 (20.1) - 1000mm	±0.20mm	0.05mm/ 1/128"	
534-108		±0.10mm	0.02mm/.001"	

\* ( ): Minimum dimension in inside measurement


## Long Jaw Vernier Caliper SERIES 534



Radiused jaws for accurate ID measurement

- Long jaws for measuring hard-to-reach workpiece features.

- Inside and outside measurements can be read directly from the upper and lower vernier scales.

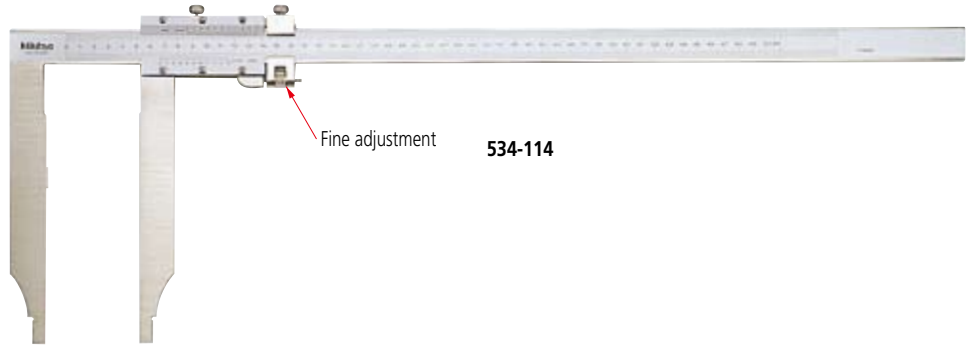

### SPECIFICATIONS

**Metric** \_\_\_\_\_ with inside measurement vernier scale

Order No.	Range*	Accuracy	Graduation	Remarks
534-113	0 (10.1) - 300mm	±0.04mm	0.02mm	with fine adjustment
534-114	0 (20.1) - 500mm	±0.06mm		
534-115	0 (20.1) - 750mm	±0.08mm		
534-116	0 (20.1) - 1000mm	±0.10mm		

\* ( ): Minimum dimension in inside measurement

**Inch** \_\_\_\_\_ with inside measurement vernier scale

Order No.	Range*	Accuracy	Graduation	Remarks
534-117	0 (.304") - 12"	±.002"	.001"	with fine adjustment
534-118	0 (.804") - 20"	±.003"		
534-119	0 (.804") - 30"	±.004"		
534-120	0 (.804") - 40"			

\* ( ): Minimum dimension in inside measurement

### DIMENSIONS

Unit: mm

Range	D	E	F	H	L	M	R	S	t
0-300mm*	90	76.5	—	20	445	7	R5	12	3.8
0-300mm/0-12"		103	38				R5		3.8
0-500mm*	112	89	—	25	682	12	R10	18.5	6
0-500mm/0-20"		112	51				R10		6
0-750mm*	150	—	—	32	995	12	R10	18.5	6
0-750mm/0-30"		62.5	—				R10		8
0-1000mm*	150	—	—	32	1230	12	R10	18.5	8
0-1000mm/0-40"		62.5	—				R10		8

\* Without fine adjustment

# Calipers

An industry standard in measuring tools

## Offset Caliper

### SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

- The beam-mounted jaw can be adjusted to facilitate measurement of stepped sections and hard-to-get-at workpiece features.
- Digital models are IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.



## SPECIFICATIONS

Metric	Digital model	
Order No.	Range	Accuracy
573-601	0 - 150mm	±0.02mm
573-611*	0 - 150mm	±0.02mm
573-602	0 - 200mm	±0.02mm
573-612*	0 - 200mm	±0.02mm
573-604	0 - 300mm	±0.03mm
573-614*	0 - 300mm	±0.03mm

\* Without thumb roller

Metric	Analog model	
Order No.	Range	Accuracy
536-101	0 - 150mm	±0.05mm
536-102	0 - 200mm	±0.05mm
536-103	0 - 300mm	±0.08mm

Inch/Metric	Digital model	
Order No.	Range	Accuracy
573-701	0 - 6"	±.001"
573-702	0 - 8"	±.001"
573-704	0 - 12"	±.0015"

## DIMENSIONS

Analog model

Digital model

Unit: mm



Order No.	Model	Range	D	G	J	N	W
573-601	Digital model	0 - 150mm	40	10	30	10	95
573-602		0 - 200mm	50	10	38.5	10	95
573-604		0 - 300mm	64	15	51	15	135
536-101	Analog model	0 - 150mm	40	10	30	10	95
536-102		0 - 200mm	50	10	38.5	10	95
536-103		0 - 300mm	64	15	51	15	135



(Refer to page X for details.)



(Refer to page X for details.)



## Technical Data

Accuracy: Refer to the list of specifications. (excluding quantizing error for digital models)  
 Resolution\*: 0.01mm or .0005"/0.01mm  
 Graduation\*\*: 0.05mm  
 Display\*: LCD  
 Scale type\*: ABSOLUTE electromagnetic induction linear encoder  
 Max. response speed\*: Unlimited  
 Battery: **SR44** (1 pc), **938882**, for initial operational checks (standard accessory)  
 Battery life\*: Approx. 3 years under normal use (1 year: 300mm model)  
 Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*  
 \* Digital models \*\* Analog models  
 \*\*\* This model is not waterproof type.  
 Therefore, rustproofing shall be applied after use.

## Optional accessories for Digital Model


For details, refer to page D-39.  
**959143**: Data hold unit  
 Connecting cables for IT/DP/MUX  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)  
**USB Input Tool Direct**  
**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
 Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for **U-WAVE** with data button (160mm)  
**02AZE140A**: SPC cable for footswitch



(Refer to page X for details.)



(Refer to page X for details.)




### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error for digital models)  
Resolution\*: 0.01mm or .0005"/0.01mm  
Graduation\*\*\*: 0.05mm  
Display\*: LCD  
Scale type\*: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed\*: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life\*: Approx. 3 years under normal use  
(1 year: 310mm model)  
Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*  
\* Digital models \*\* Analog models  
\*\*\* This model is not waterproof type.  
Therefore, rustproofing shall be applied after use.

### Optional accessories for Digital Models

For details, refer to page D-39.  
**959143**: Data hold unit  
Connecting cables for IT/DP/MUX  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)  
**USB Input Tool Direct**  
**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for **U-WAVE** with data button  
(160mm)  
**02AZE140A**: SPC cable for footswitch  
**05FAJ735**: Centerline caliper inspection gage

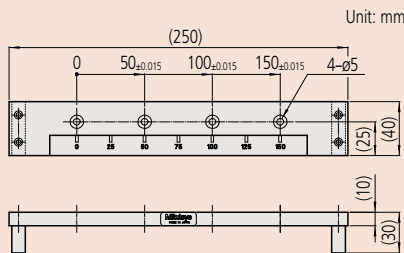


## Offset Centerline Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

- Specially designed for hole Center-to-Center measurements on the same, or offset, planes.
- Digital models are IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Direct reading of pitch measurements is available due to the offset-value setting function.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.



573-605

ABSOLUTE™

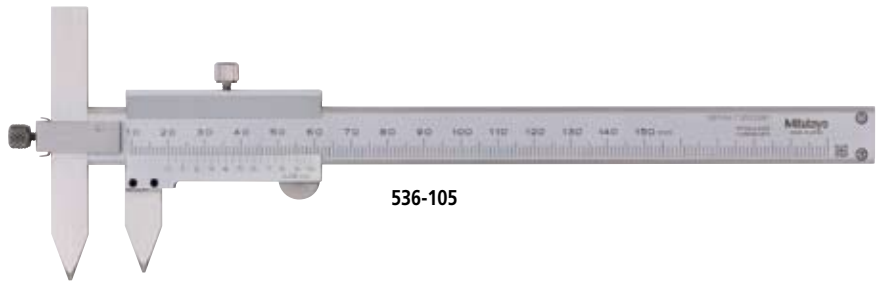

536-105

### SPECIFICATIONS


Metric	Digital model	
Order No.	Range	Accuracy
<b>573-605</b>	10.1 - 160mm	±0.03mm
<b>573-615*</b>	10.1 - 160mm	±0.03mm
<b>573-606</b>	10.1 - 210mm	±0.03mm
<b>573-616*</b>	10.1 - 210mm	±0.03mm
<b>573-608</b>	10.1 - 310mm	±0.04mm
<b>573-618*</b>	10.1 - 310mm	±0.04mm

\* Without thumb roller


Metric	Analog model	
Order No.	Range	Accuracy
<b>536-105</b>	10.1 - 150mm	±0.05mm
<b>536-106</b>	10.1 - 200mm	±0.05mm
<b>536-107</b>	10.1 - 300mm	±0.08mm

Inch/Metric	Digital model	
Order No.	Range	Accuracy
<b>573-705</b>	.404 - 6.4"	±.0015"
<b>573-706</b>	.404 - 8.4"	±.0015"
<b>573-708</b>	.404 - 12.4"	±.0015"

### DIMENSIONS



Analog model



Digital model

Unit: mm

Range	W	t
10 - 150mm	75	3
10 - 200mm	75	3
10 - 300mm	100	3.8


Range	W	t
10 - 160mm/4 - 6.4"	75	3.5
10 - 210mm/4 - 8.4"	75	3.5
10 - 310mm/4 - 12.4"	100	3.8

# Calipers



An industry standard in measuring tools

## ABSOLUTE Back-Jaw Centerline Caliper SERIES 573 - Center-to-Center & Edge-to-Center Types

- Specially designed to measure hole Center-to-Center and Edge-to-Center distances.
- Provided with jaws on the back of the slider, measurements can be read easily from above.
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.
- Dedicated calibration inspection tools are available.



- A digital model is IP67 Absolute type. (Refer to page D-8 for Absolute function.)
- Direct reading of pitch measurements is available due to the offset value setting function.

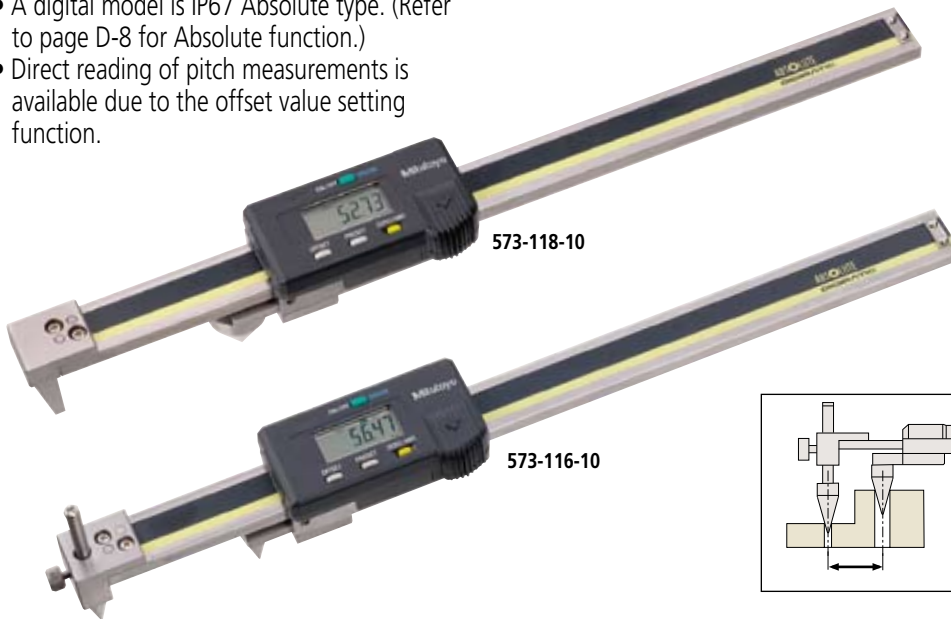


### SPECIFICATIONS


Metric	Edge-to-center distance type	
Order No.	Range	Accuracy
573-118-10	10.1 - 200mm	±0.10mm
573-119-10	10.1 - 300mm	±0.15mm

Metric	Center-to-center distance type	
Order No.	Range	Accuracy
573-116-10	10.1 - 200mm	±0.10mm
573-117-10	10.1 - 300mm	±0.15mm

### DIMENSIONS

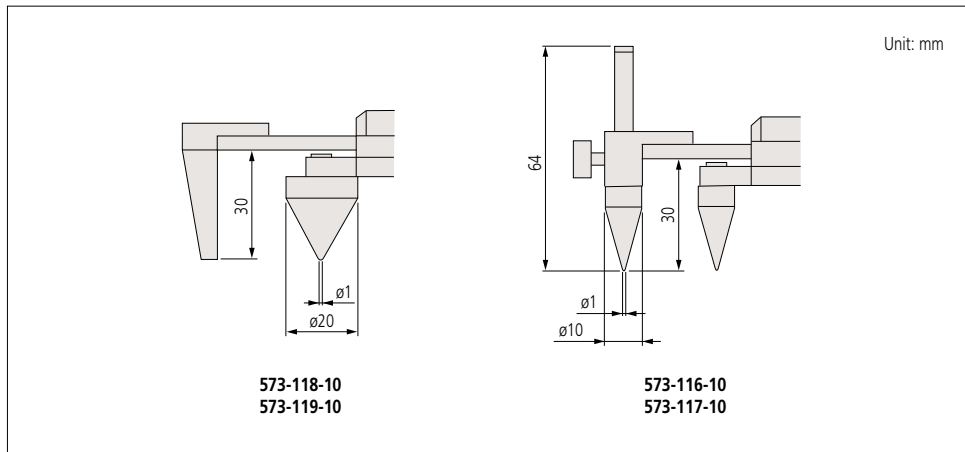

ABSOLUTE™ (Refer to page X for details.)


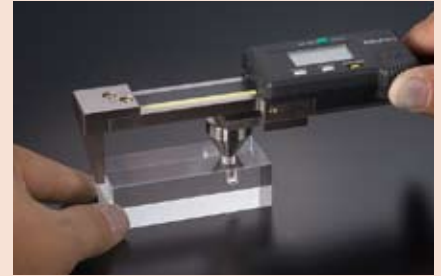


### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Display: LCD  
Scale type: ABSOLUTE electrostatic capacity linear encoder  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 3.5 years under normal use

### Optional accessories

For details, refer to page D-39.  
**959143**: Data hold unit  
Connecting cables for IT/DP/MUX  
**959149**: SPC cable with data button (1m)  
**959150**: SPC cable with data button (2m)  
**USB Input Tool Direct**  
**06ADV380C**: SPC cable for **USB-ITN-C** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790C**: SPC cable for **U-WAVE** with data button  
(160mm)  
**02AZE140C**: SPC cable for footswitch  
**05FAJ735**: Centerline caliper inspection gage

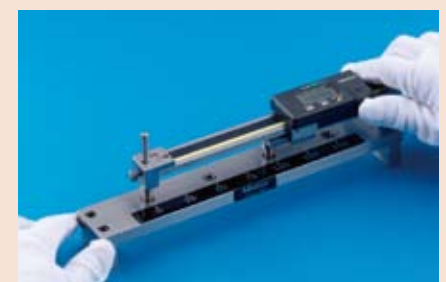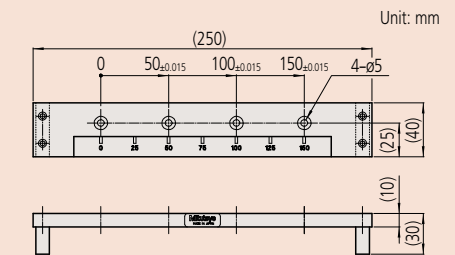



(Refer to page X for details.)



(Refer to page X for details.)



### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error for digital models)

Resolution\*: 0.01mm or .0005"/0.01mm

Graduation\*\*: 0.05mm

Display\*: LCD

Scale type\*: ABSOLUTE electromagnetic induction linear encoder

Max. response speed\*: Unlimited

Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)

Battery life\*: Approx. 3 years under normal use

Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*

\* Digital models \*\* Analog models

\*\*\* This model is not waterproof type.  
Therefore, rustproofing shall be applied after use.

### Optional accessories for Digital Models

For details, refer to page D-39.

Connecting cables for IT/DP/MUX

**05CZA624**: SPC cable with data button (1m)

**05CZA625**: SPC cable with data button (2m)

**USB Input Tool Direct**

**06ADV380A**: SPC cable for **USB-ITN-A** (2m)

Connecting cables for **U-WAVE-T**

**02AZD790A**: SPC cable for **U-WAVE** with data button (160mm)

**02AZE140A**: SPC cable for footswitch

## Point Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

- Narrow-tip jaws fit into very small grooves and tracks, making many previously difficult outside measurements far easier to obtain.
- Allows step measurement.
- Digital models are IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- SPC output models allow integration into statistical process control and measurement systems. Refer to page A-3.



### SPECIFICATIONS


Metric	Digital model	
Order No.	Range	Accuracy
<b>573-621</b>	0 - 150mm	±0.02mm
<b>573-625</b>	0 - 150mm	±0.02mm
<b>573-622*</b>	0 - 150mm	±0.02mm
<b>573-626*</b>	0 - 150mm	±0.02mm

\* without thumb roller

Inch/Metric	Digital model	
Order No.	Range	Accuracy
<b>573-721</b>	0 - 6"	±.001"
<b>573-725</b>	0 - 6"	±.001"

Metric		
Order No.	Range	Accuracy
<b>536-121</b>	0 - 150mm	±0.05mm

### DIMENSIONS

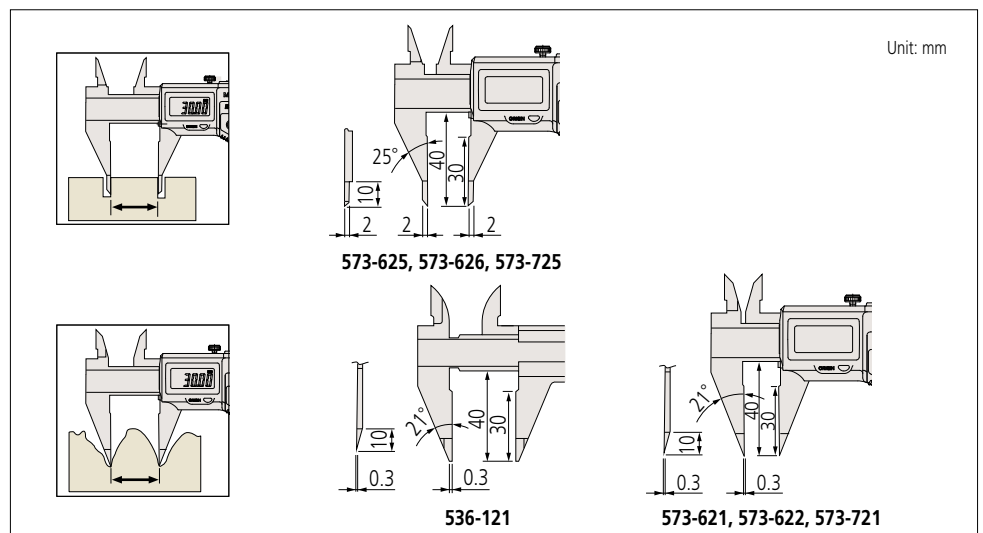




# Calipers

An industry standard in measuring tools

## Blade Type Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

- The thin blade-type jaws fit into very small grooves and make previously difficult outside measurements far easier to obtain.
- The outside measuring faces are carbide tipped.
- Allows step measurement.
- Digital models are IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.

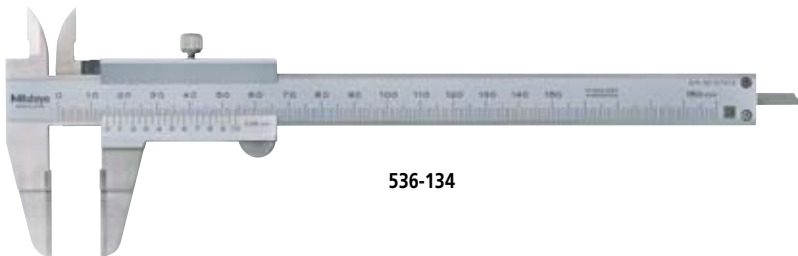

### SPECIFICATIONS


Metric	Digital model	
Order No.	Range	Accuracy
573-634	0 - 150mm	±0.02mm
573-635*	0 - 150mm	±0.02mm

\* without thumb roller

Metric		
Order No.	Range	Accuracy
536-134	0 - 150mm	±0.05mm
536-135	0 - 200mm	±0.05mm
536-136	0 - 300mm	±0.08mm

Inch/Metric	Digital model	
Order No.	Range	Accuracy
573-734	0 - 6"	±.001"

### DIMENSIONS

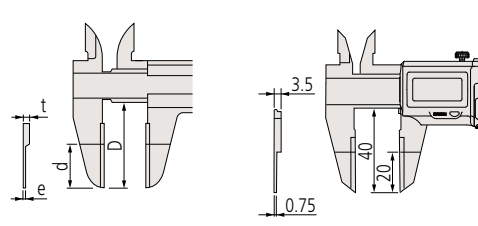

Range	D	d	e	t
0 - 150mm	40	20	0.75	3
0 - 200mm	50	25	0.75	3
0 - 300mm	64	30	1	3.8


Unit: mm



(Refer to page X for details.)



(Refer to page X for details.)



### Technical Data

Accuracy: Refer to the list of specifications. (excluding quantizing error for digital models)  
 Resolution\*: 0.01mm or .0005"/0.01mm  
 Graduation\*\*\*: 0.05mm  
 Display\*: LCD  
 Scale type\*: ABSOLUTE electromagnetic induction linear encoder  
 Max. response speed\*: Unlimited  
 Battery: **SR44** (1 pc), **938882**, for initial operational checks (standard accessory)  
 Battery life\*: Approx. 3 years under normal use  
 Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*  
 \* Digital models \*\* Analog models  
 \*\*\* This model is not waterproof type.  
 Therefore, rustproofing shall be applied after use.

### Optional accessories for Digital Models

For details, refer to page D-39.  
 Connecting cables for IT/DP/MUX  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)  
**USB Input Tool Direct**  
**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
 Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for **U-WAVE** with data button (160mm)  
**02AZE140A**: SPC cable for footswitch



(Refer to page X for details.)



(Refer to page X for details.)



### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error for digital models)

Resolution\*: 0.01mm or .00005"/0.01mm

Graduation\*\*: 0.05mm

Display\*: LCD

Scale type\*: ABSOLUTE electromagnetic induction linear encoder

Max. response speed\*: Unlimited

Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)

Battery life\*: Approx. 3 years under normal use

Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*

\* Digital models \*\* Analog models

\*\*\* This model is not waterproof type.  
Therefore, rustproofing shall be applied after use.

### Optional accessories

For details, refer to page D-39.

Connecting cables for IT/DP/MUX

**05CZA624**: SPC cable with data button (1m)

**05CZA625**: SPC cable with data button (2m)

**USB Input Tool Direct**


**06ADV380A**: SPC cable for **USB-ITN-A** (2m)

Connecting cables for **U-WAVE-T**

**02AZD790A**: SPC cable for **U-WAVE** with data button (160mm)

**02AZE140A**: SPC cable for footswitch


Knife-edge type    Inside groove type    Inside groove type

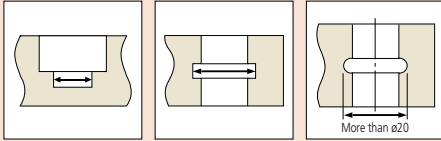


## ABSOLUTE Inside Caliper SERIES 573, 536 — Knife-edge/Inside Groove/Point Jaw Type

- Specially designed for inside measurements in hard-to-reach places.
- Digital models are IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.


### Knife-edge type

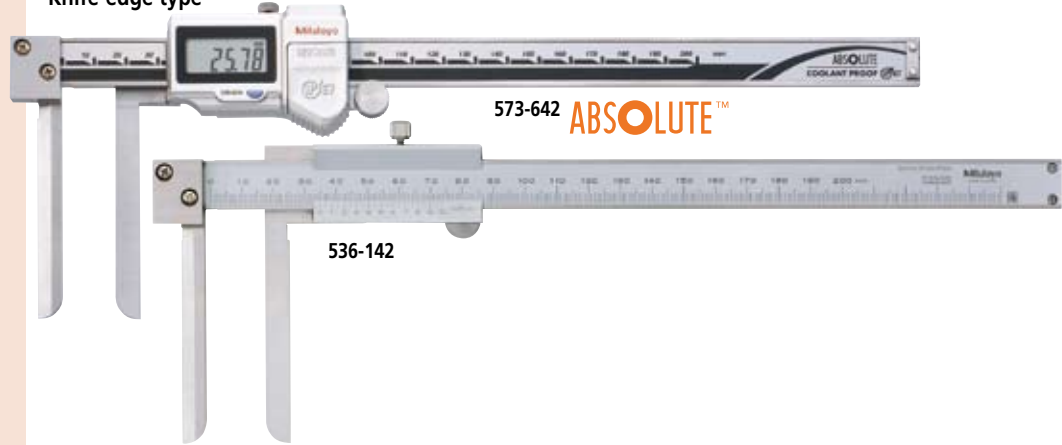

### Inside groove type

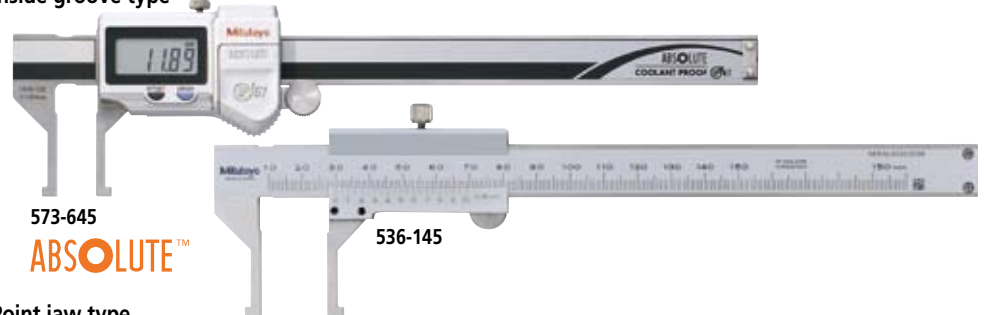

### Point jaw type

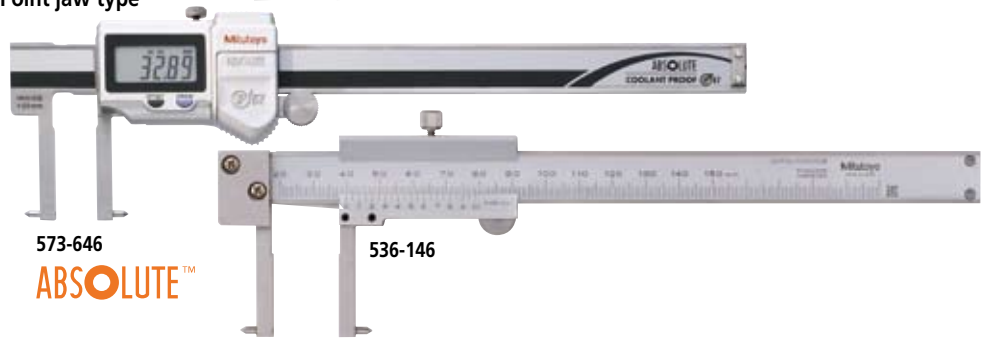

## SPECIFICATIONS

Metric	Digital model			
Order No.	Range	Accuracy	Remarks	
<b>573-642</b>	10 - 200mm	±0.05mm	Knife-edge type, Measurable min. hole diameter: ø10mm	
<b>573-643*</b>	10 - 200mm	±0.05mm	Knife-edge type, Measurable min. hole diameter: ø10mm	
<b>573-645**</b>	10.1 - 160mm	±0.05mm	Inside groove type, Measurable min. hole diameter: ø10.1mm	
<b>573-647*</b>	10.1 - 160mm	±0.05mm	Inside groove type, Measurable min. hole diameter: ø10.1mm	
<b>573-646**</b>	20.1 - 170mm	±0.03mm	Point jaw type, Measurable min. hole diameter: ø20.1mm	
<b>573-648*</b>	20.1 - 170mm	±0.03mm	Point jaw type, Measurable min. hole diameter: ø20.1mm	

\* without thumb roller  
\*\* Incorporated with the offsetting function, which indicates the actual measurement value.

Metric				
Order No.	Range	Accuracy	Remarks	
<b>536-142</b>	10 - 200mm	±0.12mm	Knife-edge type, Measurable min. hole diameter: ø10.1mm	
<b>536-145</b>	10.1 - 150mm	±0.05mm	Inside groove type, Measurable min. hole diameter: ø10.1mm	
<b>536-146</b>	20.1 - 150mm	±0.05mm	Point jaw type, Measurable min. hole diameter: ø20.1mm	
<b>536-147</b>	30.1 - 300mm	±0.08mm	Point jaw type, Measurable min. hole diameter: ø30.1mm	
<b>536-148</b>	70.1 - 450mm	±0.10mm	Point jaw type, Measurable min. hole diameter: ø70.1mm	
<b>536-149</b>	70.1 - 600mm	±0.12mm	Point jaw type, Measurable min. hole diameter: ø70.1mm	

Inch/Metric	Digital model			
Order No.	Range	Accuracy	Remarks	
<b>573-742</b>	.4 - 6"	±.002"	Knife-edge type, Measurable min. hole diameter: ø.4"	
<b>573-745**</b>	.404 - 6"	±.002"	Inside groove type, Measurable min. hole diameter: ø.404"	
<b>573-746**</b>	.804 - 6"	±.0015"	Point jaw type, Measurable min. hole diameter: ø.804"	

\*\* Incorporated with the offsetting function, which indicates the actual measurement value.


# Calipers

An industry standard in measuring tools


## DIMENSIONS

Unit: mm


Knife-edge type: 536-142

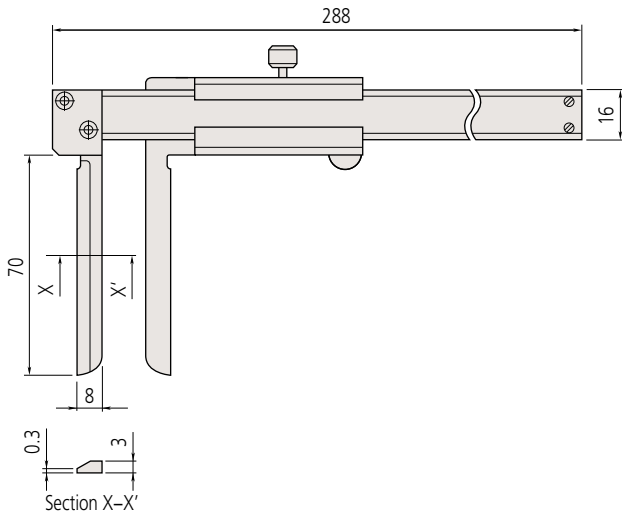


Knife-edge type: 573-642, 643, 742

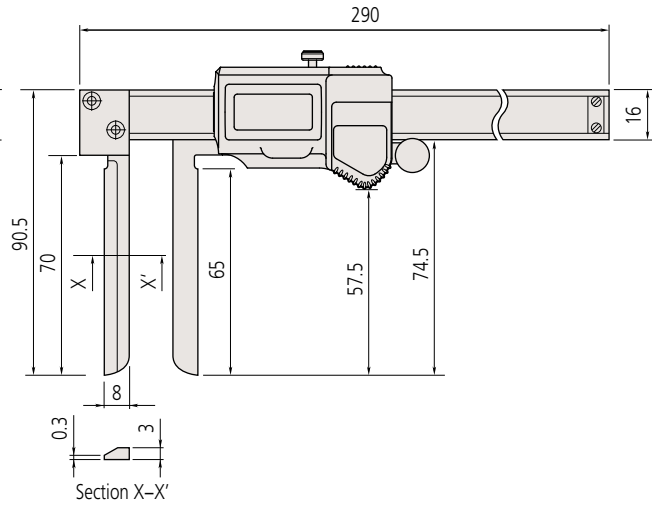


Inside groove type: 536-145

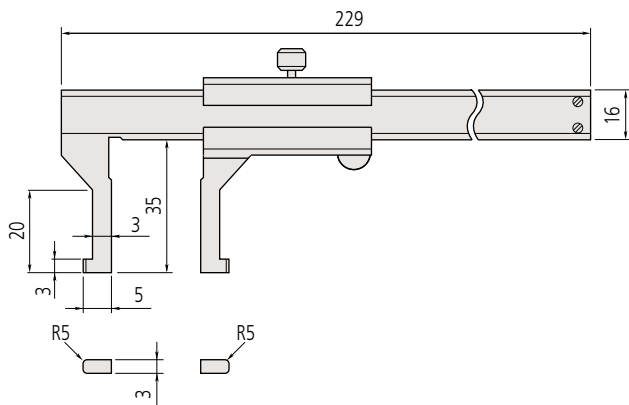


Inside groove type: 573-645, 647, 745

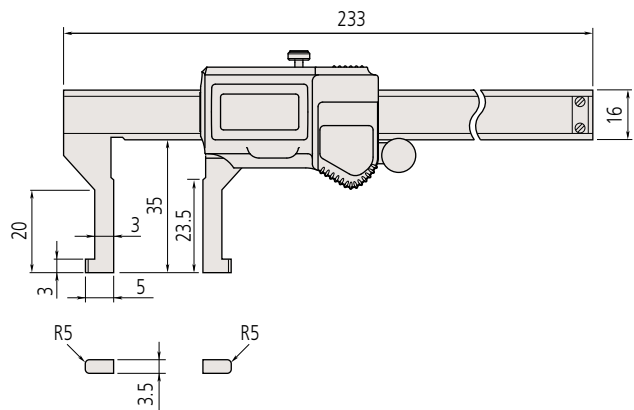

Point jaw type: 536-146, 147, 148, 149

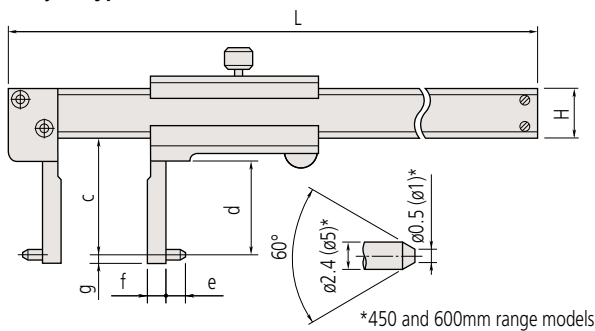

Point jaw type: 573-646, 648, 746

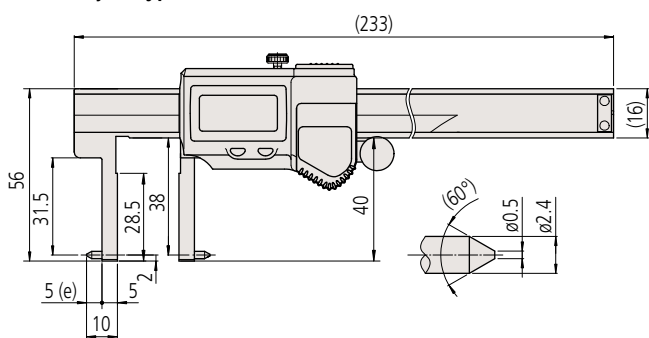


Range	c	d	e	f	g	H	L
150mm	38	31	5	5	2	16	229
300mm	98	89	5	10	2	20	403
450mm	145	136	10	25	5	25	610
600mm	145	136	10	25	5	25	750



(Refer to page X for details.)



(Refer to page X for details.)



### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error for digital models)

Resolution\*: 0.01mm or .0005"/0.01mm

Graduation\*\*: 0.05mm

Display\*: LCD

Scale type\*: ABSOLUTE electromagnetic induction linear encoder

Max. response speed\*: Unlimited

Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)

Battery life\*: Approx. 3 years under normal use

Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*

\* Digital models \*\* Analog models

\*\*\* This model is not waterproof type.  
Therefore, rustproofing shall be applied after use.

### Optional accessories

For details, refer to page D-39.

Connecting cables for IT/DP/MUX

**05CZA624**: SPC cable with data button (1m)

**05CZA625**: SPC cable with data button (2m)

**USB Input Tool Direct**

**06ADV380A**: SPC cable for **USB-ITN-A** (2m)

Connecting cables for **U-WAVE-T**

**02AZD790A**: SPC cable for **U-WAVE** with data button (160mm)

**02AZE140A**: SPC cable for footswitch


## Neck Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

- Can measure wall thickness inside bores and recesses.
- Digital models are an IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.




573-651

ABSOLUTE™

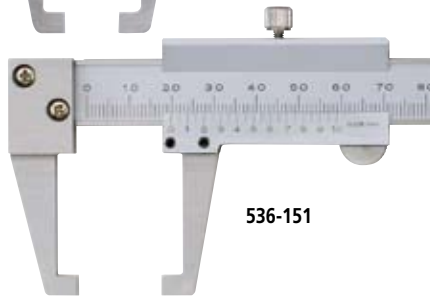

536-151

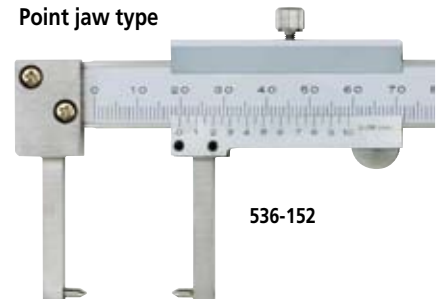

536-152

### SPECIFICATIONS

Metric	Digital model	
Order No.	Range	Accuracy
<b>573-651</b>	0 - 150mm	±0.03mm
<b>573-652*</b>	0 - 150mm	±0.03mm
<b>573-653**</b>	0 - 150mm	±0.03mm
<b>573-654***</b>	0 - 150mm	±0.03mm

\* Point type  
\*\* Without thumb roller

Metric	Digital model	
Order No.	Range	Accuracy
<b>536-151</b>	0 - 150mm	±0.05mm
<b>536-152*</b>	0 - 150mm	±0.05mm

\* Point type

Inch/Metric	Digital model	
Order No.	Range	Accuracy
573-751	0 - 6"	±.0015"
573-752*	0 - 6"	±.0015"

\* Point type

### DIMENSIONS

Unit: mm


Jaw thickness: 3mm for **536-151** and **536-152**  
3.5mm for **573-651, 653, 751** and **573-652, 654, 672**

# Calipers

An industry standard in measuring tools

## Tube Thickness Caliper SERIES 573, 536 — ABSOLUTE Digimatic and vernier type

- The beam-mounted jaw is a round bar that facilitates measurements of tube wall thickness.
- Digital models are IP67 Absolute type. No need to reset the origin after switching on. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.

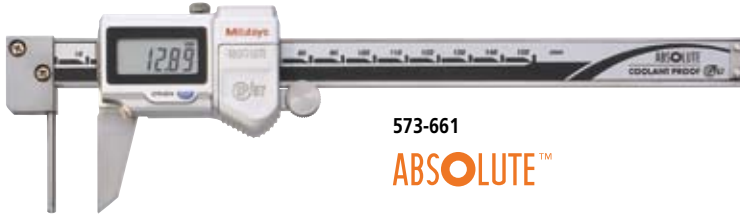

573-661

ABSOLUTE™



536-161

### SPECIFICATIONS

Metric	Digital model	
Order No.	Range	Accuracy
573-661	0 - 150mm	±0.05mm
573-662*	0 - 150mm	±0.05mm

\* without thumb roller

Metric	Analog model	
Order No.	Range	Accuracy
536-161	0 - 150mm	±0.05mm


Inch/Metric	Digital model	
Order No.	Range	Accuracy
573-761	0 - 6"	±.002"



(Refer to page X for details.)



(Refer to page X for details.)




### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error for digital models)  
Resolution\*: 0.01mm or .0005"/0.01mm  
Graduation\*\*: 0.05mm  
Display\*: LCD  
Scale type\*: ABSOLUTE electromagnetic induction linear encoder  
Max. response speed\*: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life\*: Approx. 3 years under normal use  
Dust/Water protection level\*: IP67 (IEC 60529)\*\*\*  
\* Digital models \*\* Analog models  
\*\*\* This model is not waterproof type.  
Therefore, rustproofing shall be applied after use.

### Optional accessories

For details, refer to page D-39.  
Connecting cables for IT/DP/MUX  
**05CZA624**: SPC cable with data button (1m)  
**05CZA625**: SPC cable with data button (2m)  
**USB Input Tool Direct**  
**06ADV380A**: SPC cable for **USB-ITN-A** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790A**: SPC cable for **U-WAVE** with data button (160mm)  
**02AZE140A**: SPC cable for footswitch


### DIMENSIONS

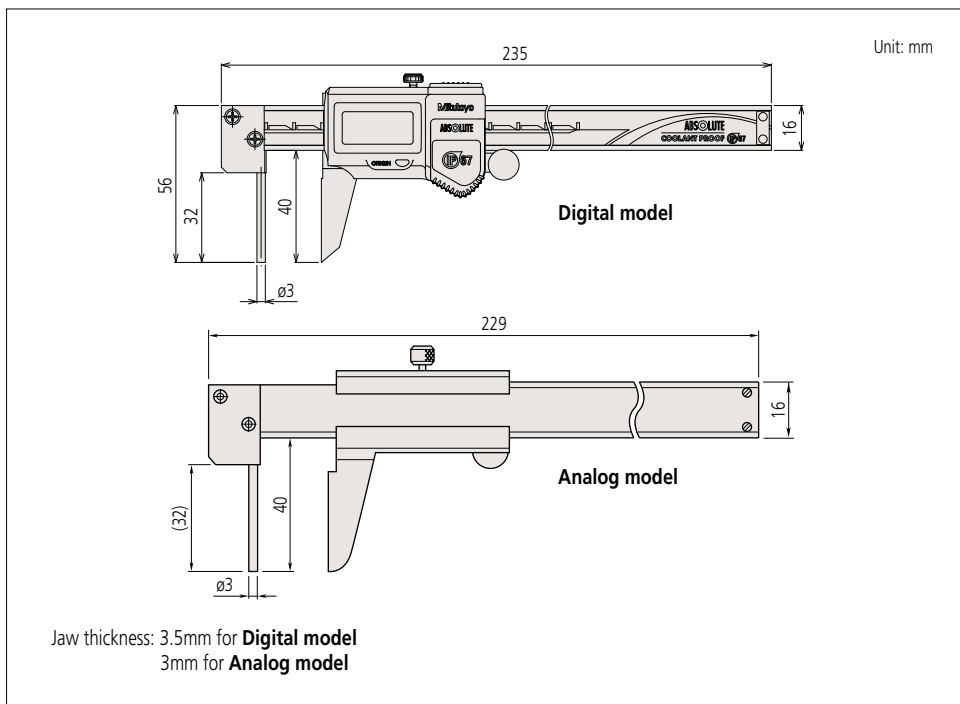




### Technical Data

Accuracy:  $\pm 0.03\text{mm}$   
 Graduation: 0.02mm



## Hook Type Vernier Caliper SERIES 536

- Can measure width of grooves and lands inside bores and recesses.

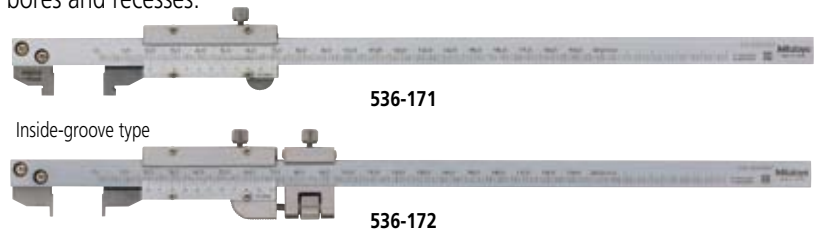

### SPECIFICATIONS

Metric			
Order No.	Range*	Accuracy	Remarks
536-171	0 - 200mm (10.1 - 200mm)	$\pm 0.03\text{mm}$	—
536-172	0 - 200mm (2.1 - 200mm)	$\pm 0.03\text{mm}$	with fine adjustment

\* ( ) : Dimension in inside measurement


### DIMENSIONS

Unit: mm								
Range	D	F	L	N	P	S	t	W
536-171*1	12	—	320	—	5	4	3.5	28
536-172*2	—	28.5	—	20	1	—	—	—

\*1: Inside measuring face is R5.  
 \*2: Inside measuring face is flat.

## Swivel Vernier Caliper SERIES 536 — Moving Jaw type

- The moving jaw can be rotated to measure sectioned shafts.
- Allows step measurement.

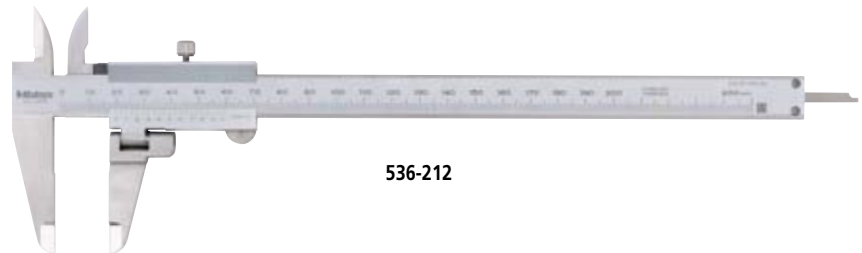

### SPECIFICATIONS

Metric			
Order No.	Range	Accuracy	Remarks
536-212	0 - 200mm	$\pm 0.05\text{mm}$	with depth bar

\* with depth bar

### DIMENSIONS

Unit: mm	
20.5	288
25	53.5
50	30
42	16

Jaw thickness: 3mm

### Technical Data

Accuracy:  $\pm 0.05\text{mm}$   
 Graduation: 0.05mm





# Calipers

An industry standard in measuring tools

## Absolute Low Force Caliper SERIES 573

- ABSOLUTE electromagnetic induction linear encoder system is introduced.
- Due to the low measuring force, these calipers are ideal for measuring elastic workpieces such as plastic parts and rubber parts that standard calipers cannot measure accurately.
- Allows fine feeding easily by using thumb roller.
- Displacement of main scale jaw is 0.3mm.
- Measuring force: 0.49N to 0.98N (0.5gf to 1.0gf)
- Absolute type. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.




573-191-30

### SPECIFICATIONS

Metric			Inch/Metric		
Order No.	Range	Accuracy*	Order No.	Range	Accuracy*
573-191-30	0 - 180mm	±0.05mm	573-291-20	0 - 7"	±.002"

\* Excluding quantizing error.  
Note) Dedicated for outside measurement (depth bar is not fitted).

### DIMENSIONS

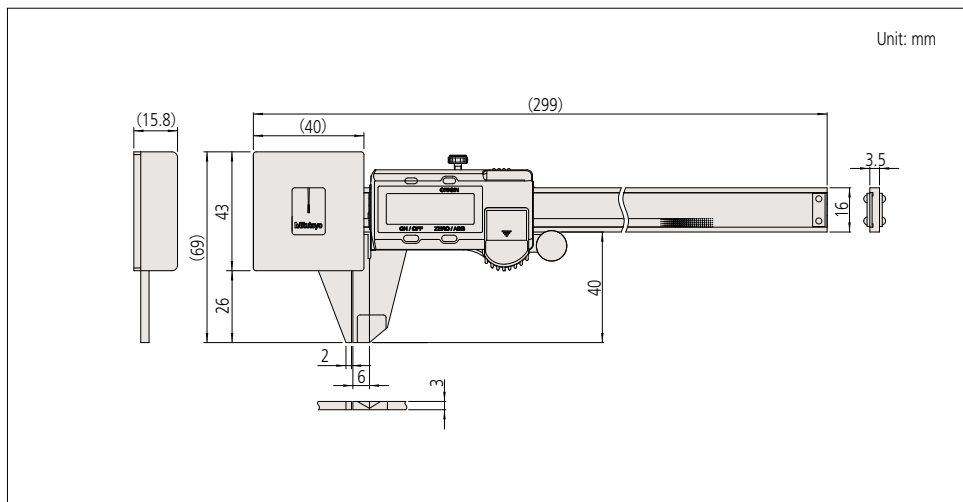


Unit: mm

ABSOLUTE™ (Refer to page X for details.)



### Technical Explanation

#### Measurement procedure



A consistently low measuring force can be guaranteed by only taking measurements when the pointer is between the two fiducial lines.

### Technical Data

Accuracy: Refer to the list of specifications. (excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Display: LCD  
Scale type\*: ABSOLUTE electromagnetic inductive linear encoder  
Jaw retraction: 0.3mm  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 3.5 years under normal use

### Optional accessories

For details, refer to page D-39.  
**959143**: Data hold unit  
Connecting cables for IT/DP/MUX  
**959149**: SPC cable with data button (1m)  
**959150**: SPC cable with data button (2m)  
**USB Input Tool Direct**  
**06ADV380C**: SPC cable for **USB-ITN-C** (2m)  
Connecting cables for **U-WAVE-T**  
**02AZD790C**: SPC cable for **U-WAVE** with data button (160mm)  
**02AZE140C**: SPC cable for footswitch

## Absolute Snap Caliper SERIES 573



### Technical Data

Accuracy: Refer to the list of specifications.  
(excluding quantizing error)  
Resolution: 0.01mm or .0005"/0.01mm  
Repeatability: 0.01mm  
Display: LCD  
Scale type: ABSOLUTE electromagnetic inductive linear encoder  
Jaw retraction: 2mm  
Max. response speed: Unlimited  
Battery: **SR44** (1 pc), **938882**,  
for initial operational checks (standard accessory)  
Battery life: Approx. 3.5 years under normal use

### Optional accessories

For details, refer to page D-39.

**959143**: Data hold unit

Connecting cables for IT/DP/MUX

**959149**: SPC cable with data button (1m)

**959150**: SPC cable with data button (2m)

#### USB Input Tool Direct


**06ADV380C**: SPC cable for **USB-ITN-C** (2m)

Connecting cables for **U-WAVE-T**

**02AZD790C**: SPC cable for **U-WAVE** with data button  
(160mm)

**02AZE140C**: SPC cable for footswitch

- ABSOLUTE electromagnetic induction linear encoder system is introduced.
- Snap mechanism allows continuous and easy measurement without moving the slider by using the lever.
- The ABSOLUTE Digimatic snap caliper features a spring-loaded mechanism to allow quick and efficient GO/NO-GO inspection for mass production parts.
- Allows step measurement
- Displacement of snap part is 2 mm.
- Measuring force: 7N to 14N
- Absolute type. (Refer to page D-8 for a description of Absolute measurement.)
- Allows integration into statistical process control and measurement systems for models with measurement data output connector. Refer to page A-3.

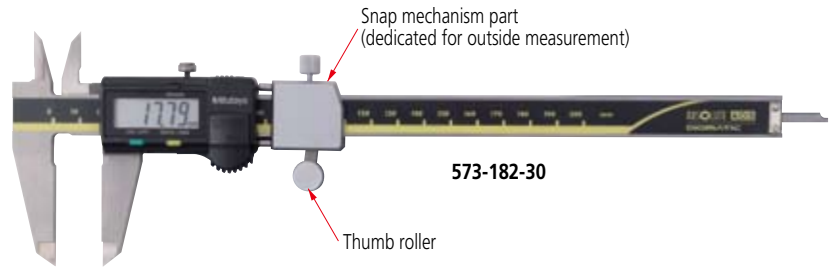


### SPECIFICATIONS

Metric			Inch/Metric		
Order No.	Range	Accuracy*	Order No.	Range	Accuracy*
<b>573-181-30</b>	0 - 100mm	±0.02mm	<b>573-281-20</b>	0 - 4"	±.001"
<b>573-182-30</b>	0 - 150mm	±0.02mm	<b>573-282-20</b>	0 - 6"	±.001"

\* Excluding quantizing error.

Note) Dedicated for outside measurement (depth bar is not fitted).

### DIMENSIONS

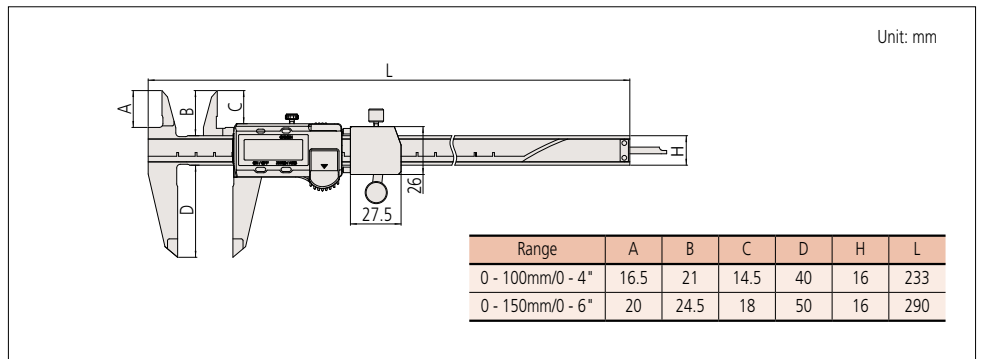

## Introduction for Measurement data recording tools for Calipers and Height Gages (optional)


### For Coolant Proof Calipers (Connector type A)

#### ■ Dedicated connecting cables (optional)

Interface for connecting to PC or PLC, and dedicated printer and its connecting cable.

- PC connection (wired system) ... **USB Input Tool** (refer to page A-5/A-6)

**USB-ITN-A (2m): No.06ADV380A**




**Dedicated cable for models with SPC data output**

- (1) 1m: **No.05CZA624**
- 2m: **No.05CZA625**

- PC connection (wireless system) ... **U-WAVE** (refer to page A-7)

**U-WAVE-T (IP67): No.02AZD730D**


**U-WAVE-T (buzzer): No.02AZD880D**



**Dedicated cable for models with SPC data output**

- (2) For standard 160mm: **No.02AZD790A**
- For footswitch: **No.02AZE140A**

- **Dedicated printer connection** (only for wired system) ... **DP-1VR** (refer to page A-13)




**Dedicated cable for models with SPC data output**

- (1) 1m: **No.05CZA624**
- 2m: **No.05CZA625**

- **Connecting to PC, PLC, etc. by RS-232C communication** (only for wired system)

... **IT-007R** (refer to page A-6), **MUX-10F** (refer to page A-14)



**Dedicated cable for models with SPC data output**

- (1) 1m: **No.05CZA624**
- 2m: **No.05CZA625**


### For Digimatic Calipers other than coolant proof type (Connector type C)

#### ■ Dedicated connecting cables (optional)

Interface for connecting to PC or PLC, and dedicated printer and its connecting cable.

- PC connection (wired system) ... **USB Input Tool** (refer to page A-5/A-6)

**USB-ITN-C (2m): No.06ADV380C**




**Dedicated cable for models with SPC data output**

- (1) 1m: **No.959149**
- 2m: **No.959150**

- PC connection (wireless system) ... **U-WAVE** (refer to page A-7)

**U-WAVE-T (IP67): No.02AZD730D**

**U-WAVE-T (buzzer): No.02AZD880D**



**Dedicated cable for models with SPC data output**

- (2) For standard 160mm: **No.02AZD790C**
- For footswitch: **No.02AZE140C**

- **Dedicated printer connection** (only for wired system) ... **DP-1VR** (refer to page A-13)




**Dedicated cable for models with SPC data output**

- (1) 1m: **No.959149**
- 2m: **No.959150**

- **Connecting to PC, PLC, etc. by RS-232C communication** (only for wired system)

... **IT-007R** (refer to page A-6), **MUX-10F** (refer to page A-14)



**Dedicated cable for models with SPC data output**

- (1) 1m: **No.959149**
- 2m: **No.959150**


### For Digimatic Height Gages (Connector type F)

#### ■ Dedicated connecting cables (optional)

Interface for connecting to PC or PLC, and dedicated printer and its connecting cable.

- PC connection (wired system) ... **USB Input Tool** (refer to page A-5/A-6)

**USB-ITN-F (2m): No.06ADV380F**



**Dedicated cable for models with SPC data output**

- (1) 1m: **No.905338**
- 2m: **No.905409**

- PC connection (wireless system) ... **U-WAVE** (refer to page A-7)

**U-WAVE-T (IP67): No.02AZD730D**


**U-WAVE-T (buzzer): No.02AZD880D**



**Dedicated cable for models with SPC data output**

- (2) For standard 160mm: **No.02AZD790F**
- For footswitch: **No.02AZE140F**

- **Dedicated printer connection** (only for wired system) ... **DP-1VR** (refer to page A-13)




**Dedicated cable for models with SPC data output**

- (1) 1m: **No.905338**
- 2m: **No.905409**

- **Connecting to PC, PLC, etc. by RS-232C communication** (only for wired system)

... **IT-007R** (refer to page A-6), **MUX-10F** (refer to page A-14)




**Dedicated cable for models with SPC data output**

- (1) 1m: **No.905338**
- 2m: **No.905409**


# Quick Guide to Precision Measuring Instruments Calipers

## ■ Nomenclature

### Vernier Caliper

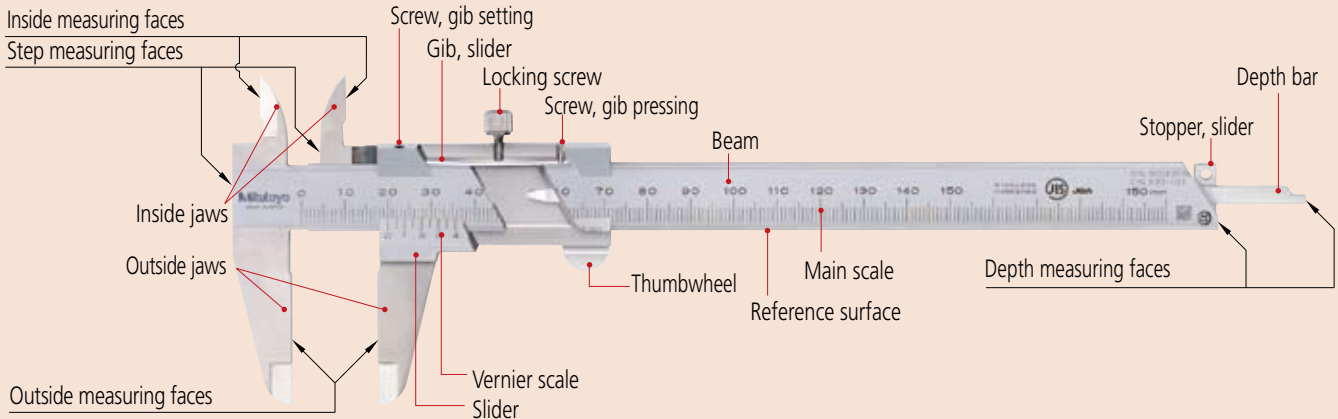


### Absolute Digimatic Caliper

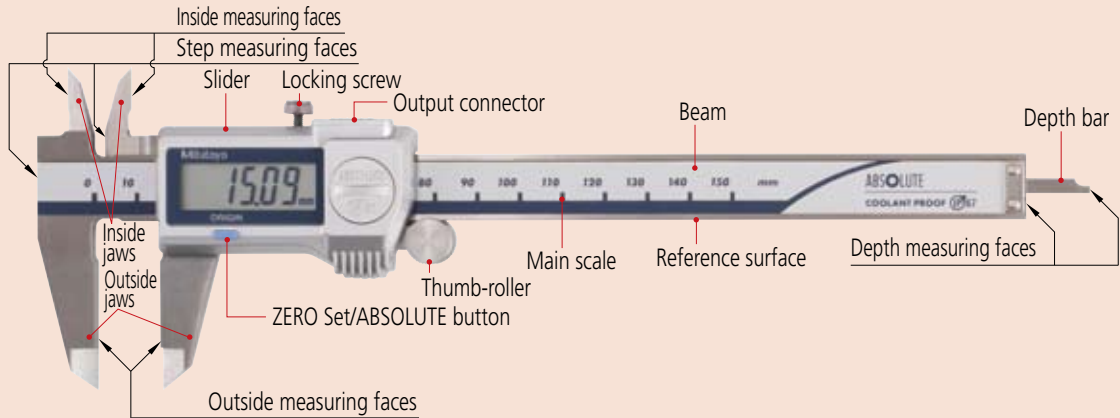


## ■ How to Read the Scale

### ● Vernier Calipers

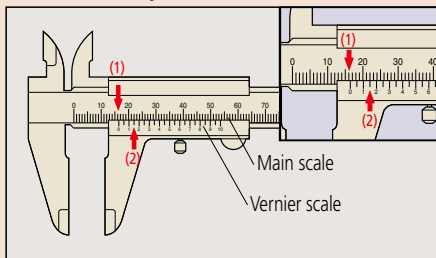

Graduation	0.05mm
(1) Main scale	16 mm
(2) Vernier	0.15 mm
Reading	16.15 mm


### ● Dial Calipers

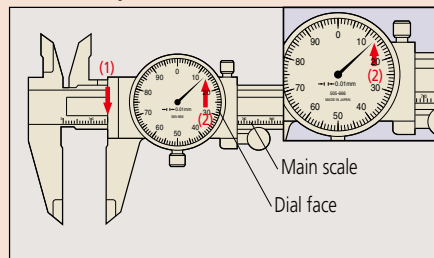

Graduation	0.01mm
(1) Main scale	16 mm
(2) Dial face	0.13 mm
Reading	16.13 mm


Note) Above left, 0.15 mm (2) is read at the position where a main scale graduation line corresponds with a vernier graduation line.

## ■ Measurement examples

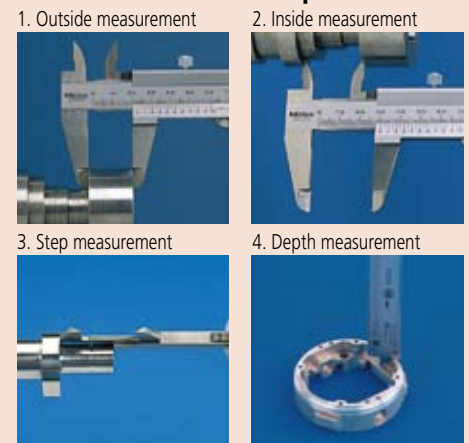


## ■ Special Purpose Caliper Applications

### Point jaw type




For uneven surface measurement

### Offset jaw type




For stepped feature measurement

### Depth type



For depth measurement


### Blade jaw type



For diameter of narrow groove measurement


## Vernier scale

This is a short auxiliary scale that enables accurate interpolation between the divisions of a longer scale without using mechanical magnification. The principle of operation is that each vernier scale division is slightly smaller than a main scale division, so that successive vernier graduations successively coincide with main scale graduations as one is moved relative to the other. Specifically,  $n$  divisions on a vernier scale are the same length as  $n-1$  divisions on the main scale it works with, and  $n$  defines the division (or interpolation) ratio. Although  $n$  may be any number, in practice it is typically 10, 20, 25, etc., so that the division is a useful decimal fraction. The example below is for  $n = 10$ . The main scale is graduated in mm, and so the vernier scale is 9mm (10 divisions) long, the same as 9mm (9 divisions) on the main scale. This produces a difference in length of 0.1mm (1) as shown in figure A (the 1st vernier graduation is aligned with the first main scale graduation). If the vernier scale is slid 0.1mm to the right as shown in figure B, the 2nd graduation line on the vernier scale moves into alignment with the 2nd line on the main scale (2), and so enables easy reading of the 0.1mm displacement.

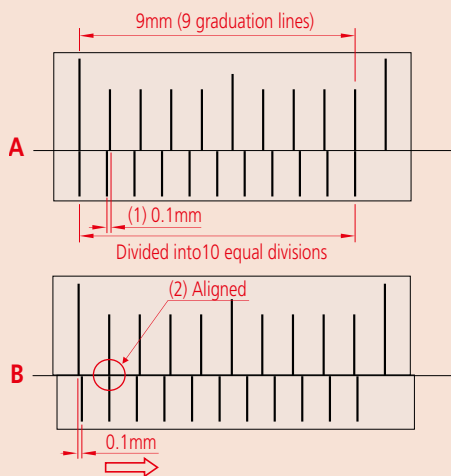


Some early calipers divided 19 divisions on the main scale by 20 vernier divisions to provide 0.05mm resolution. However, the closely spaced lines proved difficult to read and so, since the 1970s, a long vernier scale that uses 39 main scale divisions to spread the lines is generally used instead, as shown below.

### 19mm Vernier scale



Scale reading 1.45mm


### 39mm vernier scale (long vernier scale)



Scale reading 30.35mm


Calipers were made that gave an even finer resolution of 0.02mm. These required a 49-division vernier scale dividing 50 main scale divisions. However, they were difficult to read and are now hard to find since Digital calipers with an easily read display and resolution of 0.01mm appeared.

### C-type



Standard outside measurement  
Inside measurement of a stepped hole  
Measurement of a stepped part

### CN-type




Standard outside measurement  
Measurement of a stepped hole  
Measurement of a stepped part

## About Long Calipers

Steel rules are commonly used to roughly measure large workpieces but if a little more accuracy is needed then a long caliper is suitable for the job. A long caliper is very convenient for its user friendliness but does require some care in use. In the first place it is important to realize there is no relationship between resolution and accuracy. For details, refer to the values in our catalog. Resolution is constant whereas the accuracy obtainable varies dramatically according to how the caliper is used.

The measuring method with this instrument is a concern since distortion of the main beam causes a large amount of the measurement error, so accuracy will vary greatly depending on the method used for supporting the caliper at the time. Also, be careful not to use too much measuring force when using the outside measuring faces as they are furthest away from the main beam so errors will be at a maximum here. This precaution is also necessary when using the tips of the outside measuring faces of a long-jaw caliper.

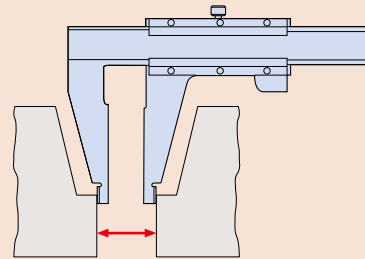

## Small hole measurement with an M-type caliper

A structural error  $d$  occurs when you measure the internal diameter of a small hole.

$\varnothing D$ : True internal diameter

$\varnothing d$ : Measured diameter


$t_1, t_2$ : Thickness of the inside jaw

$C$ : Distance between the inside jaws

$\Delta d$ : Measurement error ( $\varnothing D - \varnothing d$ )



True internal diameter ( $\varnothing D$ : 5mm) Unit: mm

$t_1+t_2+C$	0.3	0.5	0.7
$\Delta d$	0.009	0.026	0.047

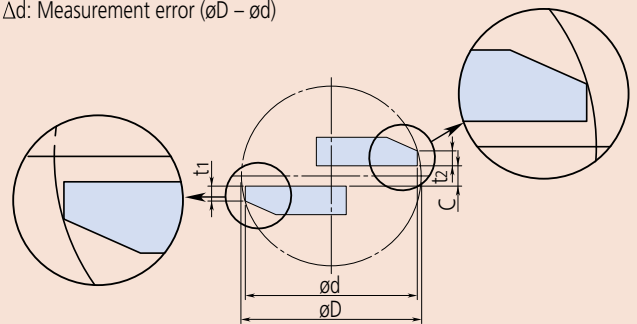

## Inside Measurement with a CM-type Caliper

Because the inside measuring faces of a CM-type caliper are at the tips of the jaws the measuring face parallelism is heavily affected by measuring force, and this becomes a large factor in the measurement accuracy attainable. In contrast to an M-type caliper, a CM-type caliper cannot measure a very small hole diameter because it is limited to the size of the stepped jaws, although normally this is no inconvenience as it would be unusual to have to measure a very small hole with this type of caliper. Of course, the radius of curvature on the inside measuring faces is always small enough to allow correct hole diameter measurements right down to the lowest limit (jaw closure). Mitutoyo CM-type calipers are provided with an extra scale on the slider for inside measurements so they can be read directly without the need for calculation, just as for an outside measurement. This useful feature eliminates the possibility of error that occurs when having to add the inside-jaw-thickness correction on a single-scale caliper.

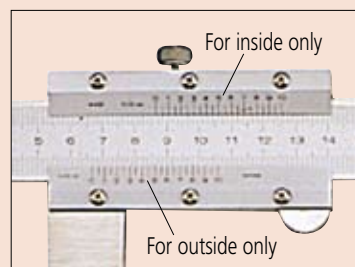




## General notes on use of caliper

### 1. Potential causes of error

A variety of factors can cause errors when measuring with a caliper. Major factors include parallax effects, excessive measuring force due to the fact that a caliper does not conform to Abbe's Principle, differential thermal expansion due to a temperature difference between the caliper and workpiece, and the effect of the thickness of the knife-edge jaws and the clearance between these jaws during measurement of the diameter of a small hole. Although there are also other error factors such as graduation accuracy, reference edge straightness, main scale flatness on the main blade, and squareness of the jaws, these factors are included within the instrumental error tolerances. Therefore, these factors do not cause problems as long as the caliper satisfies the instrumental error tolerances. Handling notes have been added to the JIS so that consumers can appreciate the error factors caused by the structure of the caliper before use. These notes relate to the measuring force and stipulate that "as the caliper does not have a constant-force device, you must measure a workpiece with an appropriate even measuring force. Take extra care when you measure it with the root or tip of the jaw because a large error could occur in such cases."

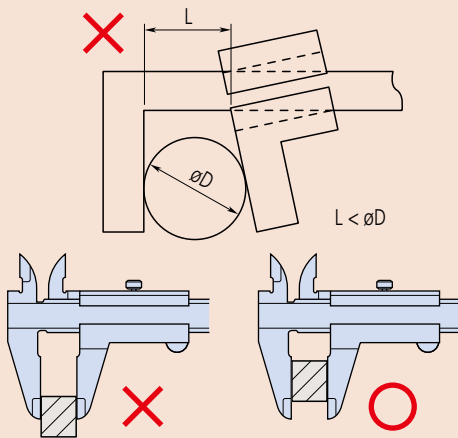

### 2. Inside measurement


Insert the inside jaw as deeply as possible before measurement.  
Read the maximum indicated value during inside measurement.  
Read the minimum indicated value during groove width measurement.

### 3. Depth measurement

Read the minimum indicated value during depth measurement.


### 4. Parallax error when reading the scales

Look straight at the vernier graduation line when checking the alignment of vernier graduation lines to the main scale graduation lines.  
If you look at a vernier graduation line from an oblique direction (A), the apparent alignment position is distorted by  $\Delta X$  as shown in the figure below due to a parallax effect caused by the step height (H) between the planes of the vernier graduations and the main scale graduations, resulting in a reading error of the measured value. To avoid this error, the JIS stipulates that the step height should be no more than 0.3 mm.

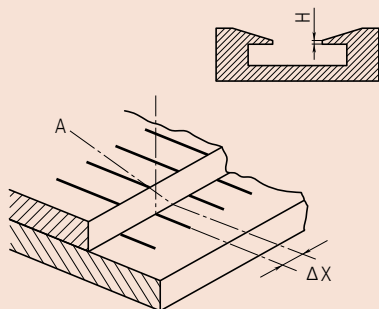

### 5. Moving Jaw Tilt Error

If the moving jaw becomes tilted out of parallel with the fixed jaw, either through excessive force being used on the slider or lack of straightness in the reference edge of the beam, a measurement error will occur as shown in the figure. This error may be substantial due to the fact that a caliper does not conform to Abbe's Principle.

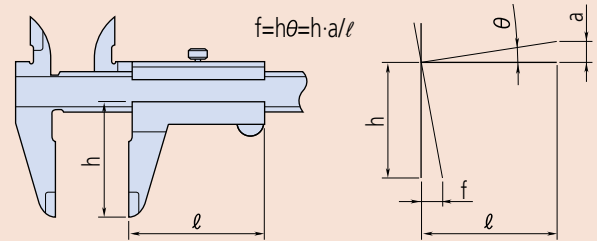

Example: Assume that the error slope of the jaws due to tilt of the slider is 0.01mm in 50mm and the outside measuring jaws are 40mm deep, then the error (at the jaw tip) is calculated as  $(40/50) \times 0.01 \text{ mm} = 0.008 \text{ mm}$ .  
If the guide face is worn then an error may be present even using the correct measuring force.

### 6. Relationship between measurement and temperature

The main scale of a caliper is engraved (or mounted on) stainless steel, and although the linear thermal expansion coefficient is equal to that of the most common workpiece material, steel, i.e.  $(10.2 \pm 1) \times 10^{-6} / \text{K}$ , note that other workpiece materials, the room temperature and the workpiece temperature may affect measurement accuracy.

### 7. Handling


Caliper jaws are sharp, and therefore the instrument must be handled with care to avoid personal injury.  
Avoid damaging the scale of a digital caliper and do not engrave an identification number or other information on it with an electric marker pen.  
Avoid damaging a caliper by subjecting it to impact with hard objects or by dropping it on a bench or the floor.

### 8. Maintenance of beam sliding surfaces and measuring faces

Wipe away dust and dirt from the sliding surfaces and measuring faces with a dry soft cloth before using the caliper.

### 9. Checking and setting the origin before use

Clean the measuring surfaces by gripping a sheet of clean paper between the outside jaws and then slowly pulling it out. Close the jaws and ensure that the vernier scale (or display) reads zero before using the caliper. When using a Digimatic caliper, reset the origin (ORIGIN button) after replacing the battery.



### 10. Handling after use

After using the caliper, completely wipe off any water and oil. Then, lightly apply anti-corrosion oil and let it dry before storage.  
Wipe off water from a waterproof caliper as well because it may also rust.

### 11. Notes on storage

Avoid direct sunlight, high temperatures, low temperatures, and high humidity during storage.  
If a digital caliper will not be used for more than three months, remove the battery before storage.  
Do not leave the jaws of a caliper completely closed during storage.