


Double Edge Cutting



Double Edge Cutting

NOGA KEYWAY-BURR NG3300

Efficiently removes burrs from internal and external keyways. Range: 2.4-11 mm.
INCLUDES: NG-3 handle, K holder and N80K blade.

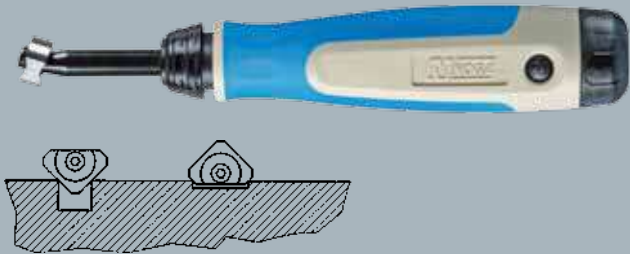

NOGA V CUT NG3200

For deburring sheet metal. Range: 1-8 mm.
INCLUDES: NG-3 handle, L holder and L3 blade.



NOGA MINI CUT NG3220

Used for deburring small ridges in difficult to reach places. Range: 0-2.5 mm.
INCLUDES: NG-3 handle, L holder and L4 blade.




NOGA O-RING BURR NG1100

Removes burrs from internal O-ring grooves. Range 0-3 mm (groove width).
INCLUDES: NG-1 handle and O-ring blade.



NOGA DOUBLE-BURR DB1000


Simultaneously removes burrs from both sides of sheet metal. DB handle with safety guard to protect your hand. Unique round cutting blades can be rotated and reversed for long life. For corners, use one blade only. Range: 0-12mm.
INCLUDES: DB handle, handguard and two N80 blades.



Double Edge Cutting Blades



Handles Blades

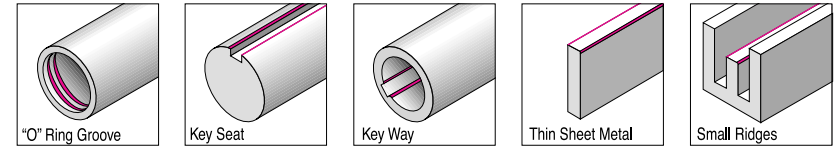

NG-1 Handle NG1000
 NogaGrip-1 - holds all blades (3.2mm).
 Designed for maximum comfort in your hand.



NG-3 Handle NG3000
 NogaGrip-3 - holds all blade holders.
 Designed for maximum comfort in your hand.



K Holder EL04003
 Holds K blades with M3 screw. Length 135 mm.



L Holder EL07013
 Holds L blades. Blades are held in a 3mm square hole and tightened with a 4 mm setscrew. Length 131 mm.



BLADES

	order no.		range (mm)	angle (degrees)	package weight (g)	package quantity
N80	BN8010		0-12	55	34	10
N80M42	BN8043		0-12	55	32	10
N70K	BN7001		1.2-8	55	5	1
N80K	BN8110		2.4-11	55	31	10
N80KM42	BN8143		2.4-11	55	29	10
N90K	BN9009		3-15	55	8	1
L3	BL3001		1-8	50	6	1
L4	BL4001		0.5-2.5	50	6	1
O-Ring	BO1001		1-3	40	9	1

All blades are made of H.S.S. Hardness 62-64Rc except N80M42 and N80KM42, 66-68Rc