



# Digital Caliper

## SDN SERIES

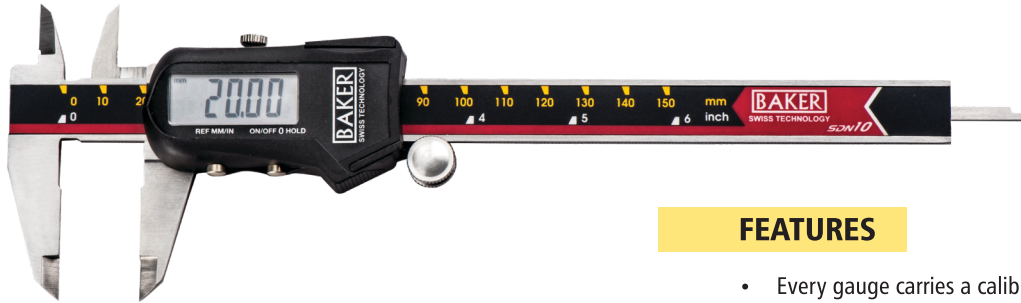

SDN10

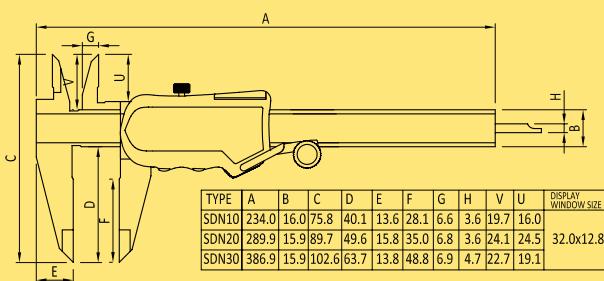


Type	Reading	Range	Weight
SDN10		0 - 150mm / 0 - 6"	145 g
SDN20	0.01mm / 0.0005 "	0 - 200mm / 0 - 8"	170 g
SDN30		0 - 300mm / 0 - 12"	210 g


### FEATURES

- Every gauge carries a calibration certificate giving actual values
- Robust, Hardened and Ground stainless steel jaws and beam
- Accuracy as per DIN 862
- Attractive shape and elegant design complimented by uncompromising performance
- 9.6 mm tall, high contrast Liquid Crystal Display significantly augments visibility and minimizes user fatigue
- All three ranges of calipers are fitted with thumb-roller to improve quality of measurement
- Latest Smart Inductive System (S.I.S)
- Easy and quick operation (user friendly)
- Battery changeover is fast, easy and reliable
- All three varieties of digital calipers are capable of External, Internal, Step and Depth measurement
- Display refresh rate greater than 7 / sec
- Power supply 1 Lithium battery, type CR2032, 3V, 220 mAh
- Working temperature 5 to 40 °C
- Max. slider speed 1.5 m/s

## LARGE SDN SERIES

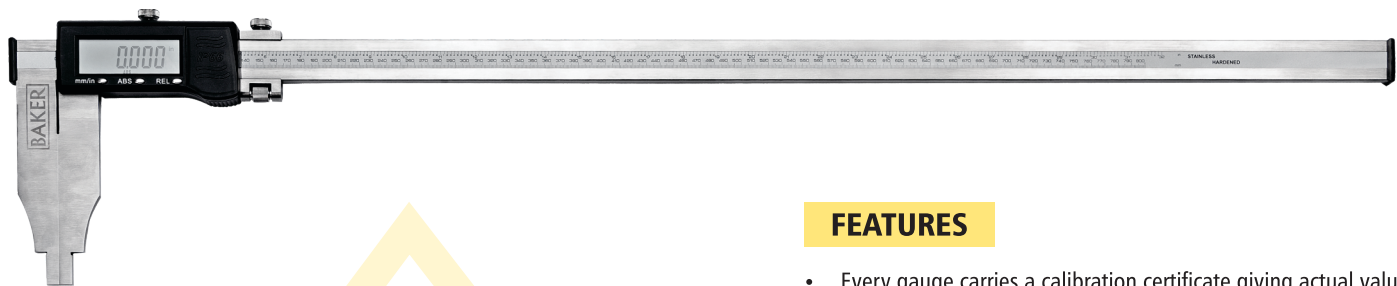

SDN80

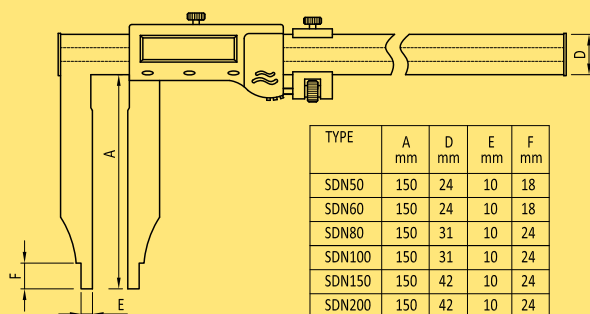

### FEATURES

- Every gauge carries a calibration certificate giving actual values
- Degree of protection IP66 (according to IEC 60529)
- High contrast Liquid Crystal Display
- Ergonomic beam design increases comfort; reduces fatigue
- Fine adjustment with the lock provided for ease of setting
- Auto switch-OFF
- Accuracy as per DIN 862
- Easy and quick operation (user friendly)
- Battery changeover is fast, easy and reliable
- Power supply 1 Lithium battery, type CR2032, 3V, 220 mAh
- Working temperature 5 to 40 °C

Type	Reading	Range
SDN50	0.01 mm/0.0005"	0 - 500 mm / 0 - 20"
SDN60		0 - 600 mm / 0 - 24"
SDN80		0 - 800 mm / 0 - 32"
SDN100		0 - 1000 mm / 0 - 40"