

## COATING THICKNESS GAUGE (STANDARD TYPE)



VIDEO

FOR MAGNETIC AND  
NON-MAGNETIC SUBSTRATES

BLUETOOTH

DATA  
OUTPUT

- Magnetic induction probe (FE) measures the thickness of non-magnetic coating and non-metallic coating on magnetic metal substrate.  
Substrate: iron, steel, magnetic stainless steel (not for non-magnetic stainless steel)  
Coating: zinc, copper, chrome, tin, plastic, powder, paint (not for nickel)
- Eddy current probe (NFE) measures the thickness of non-conductive coating on non-magnetic metal substrate.  
Substrate: copper, aluminum, zinc, non-magnetic stainless steel  
Coating: plastic, powder, paint, anodizing (not for chrome and zinc plating)
- Tolerance measurement
- Data statistic, including average, variance, maximum and minimum values
- Data can be sent to Excel by connecting to computers via bluetooth or cable of receiver
- Support bluetooth printer
- Automatic power off


zero calibration block  
(included)calibration foils  
(included)

receiver (optional)

eddy current probe **NFE**  
with zero calibration block  
(9501-1200N included)magnetic induction  
probe **FE10** for large  
range (optional)magnetic induction  
probe **FE90** for bores  
and grooves (optional)

9501-1200

Unit: mm

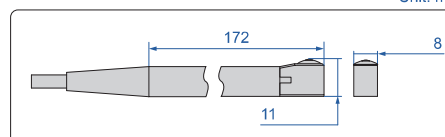

FE90 probe dimension

### SPECIFICATION

Code	9501-1200	9501-1200N
Probe	magnetic induction probe	eddy current probe
Measuring range	refer to the specification of probes	
Accuracy	$\pm(3\%L+1)\mu\text{m}$ (range $\leq 1250\mu\text{m}$ ) $\pm(3\%L+10)\mu\text{m}$ (range $> 1250\mu\text{m}$ ) L is measuring thickness in $\mu\text{m}$	
Resolution	$0.1\mu\text{m}$ (range $< 100\mu\text{m}$ ) $1\mu\text{m}$ (range $\geq 100\mu\text{m}$ )	
Measuring mode	continuous and single	
Storage capacity	600	
Output	Type-C	
Power supply	2×1.5V AA batteries	
Dimensions	135×77×32mm	
Weight	172g	

### STANDARD DELIVERY

Code	9501-1200	9501-1200N
Magnetic induction probe (9501-1200-FE)	1 pc	-
Zero calibration block for FE probe	1 pc	-
Eddy current probe (9501-1200-NFE)	-	1 pc
Zero calibration block for NFE probe	-	1 pc
Main unit	1 pc	1 pc
Software and USB cable	1 pc	1 pc
Calibration foils (50/100/250/500/1000 $\mu\text{m}$ )	1 set	1 set
1.5V AA battery	2 pcs	2 pcs

### OPTIONAL ACCESSORY

Code	9501-1200	9501-1200N
Probe	9501-1200-NFE, 9501-1200-FE90, 9501-1200-FE10	9501-1200-FE, 9501-1200-FE90, 9501-1200-FE10
Receiver	ISR-C300-RECEIVER	
Cable of receiver	9501-1200-CABLE	
Bluetooth printer	ISR-C002-PRINTER	

### SPECIFICATION OF PROBES

Code	Range	Minimum substrate thickness	Minimum measuring area	Minimum curvature radius of convex workpiece	Probe type
9501-1200-FE	0~1250 $\mu\text{m}$	0.5mm	$\varnothing 7\text{mm}$	1.5mm	magnetic induction probe (FE)
9501-1200-NFE	0~1250 $\mu\text{m}$	0.3mm	$\varnothing 15\text{mm}$	3mm	eddy current probe (NFE)
9501-1200-FE90	0~1250 $\mu\text{m}$	0.5mm	$\varnothing 7\text{mm}$	—	magnetic induction probe (FE90) for bores and grooves
9501-1200-FE10	500 $\mu\text{m}$ ~10000 $\mu\text{m}$	2mm	$\varnothing 40\text{mm}$	10mm	magnetic induction probe (FE10) for large range