



CODE U3333


**UNIQUE MODULAR PRECISION MACHINE VISE**

WITH OPTIONAL SWIVEL BASE

HARDNESS : HRC 60 ± 2



Swivel Base

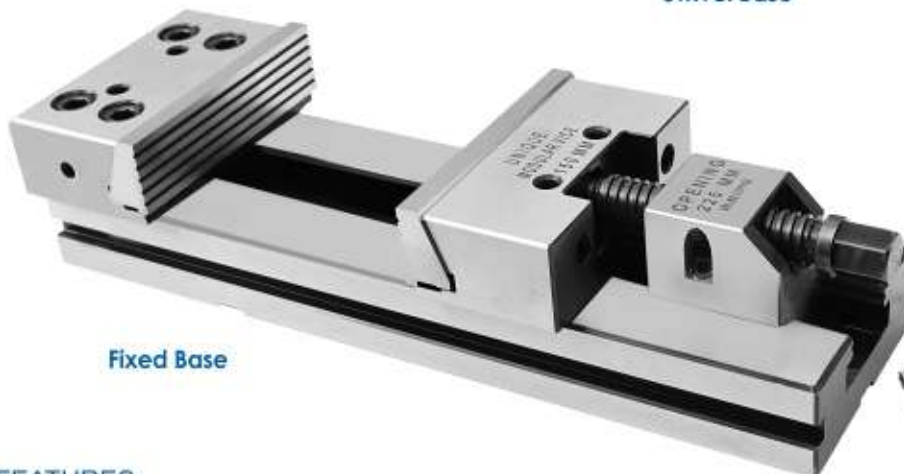

Fixed Base



TAPER JAWS



PARALLEL JAWS



JAW OPTIONS



PLAIN JAW



SERRATED JAW



INTERMEDIATE JAW



PRISMATIC JAW






V TYPE JAW



HIGH JAW

FEATURES

- Low Profile, Anti Lift Vise.
- Made of High Grade Alloy Steel, stabilized and hardened.
- Accuracy in squareness ± 0.01/100 mm
- All vise parts are Case Hardened to HRC 60 ± 2, to give maximum rigidity, high performance and No wear.
- As the bed height is maintained, multiple vises can be used in series so as to hold longer work pieces.
- Hammer Less Vise : Both Jaw Plates are in Pull-Down Angle, which pulls down the piece on to the vise bed / parallels for rigid clamping.
- Supplied with stopper for fast production.

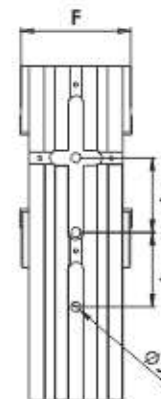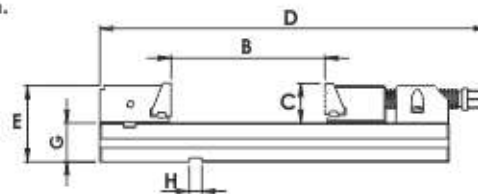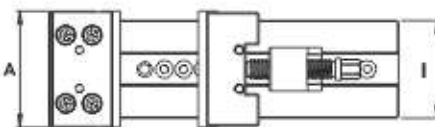

Jaw Width		Opening		All dimensions in mm										
A	B	C	D	E	F	G	H	I	J	J1	Weight (Kgs)	Clamping Pressure (KGF)		
100	130	40	325	71	102	45	16	90	100	13	14	2500		
125	175	40	375	90	125	50	16	100	100	13	17	3000		
150	225	50	450	98	150	50	16	125	100	13	29	3500		
	300		525								31			
200	300	60	555	118	203	57	16	175	100	13	53	4000		
	400		655								58			